

EXCEPT AS OTHERWISE PROVIDED BY CONTRACT, THIS DRAWING AND SPECIFICATIONS SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF MATTER DEPICTED HEREIN WITHOUT THE EXPRESSED WRITTEN PERMISSION OF THE CLAUDE LAVAL CORPORATION, OR ITS ASSIGNEES.

NOTES:


1. INLET & OUTLET FLANGES ARE 6" 150# RF PER ANSI B16.5 REQUIRING 8X  $\phi 3/4$ " BOLTS (BOLTS AND GASKETS NOT INCLUDED).
2. MAXIMUM PRESSURE: 250 psi (17.24 bar).
3. MAXIMUM TEMPERATURE: 230°F (110°C).
4. PRESSURE LOSS: 5-18 psid (.34-1.24 bar) AT RATED FLOW.
5. RATED FLOW: 425-820 gpm (96.5-186.2 m<sup>3</sup>/hr).
6. APPROXIMATE DRY WEIGHT: 1100 lbs (499 kg).
7. FINISH: LAKOS BLUE (EXTERIOR ONLY).

THIS DRAWING HAS BEEN GENERATED AND IS MAINTAINED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY AN APPROVED ENGINEERING CHANGE ORDER (ECO). PAPER COPIES ARE UNCONTROLLED.

REVISIONS				
ECN	REV.	DESCRIPTION	DATE	APPROVED


### SUBMITTAL DRAWING

This drawing is submitted for spatial consideration only. Do not pre-plumb to these dimensions.

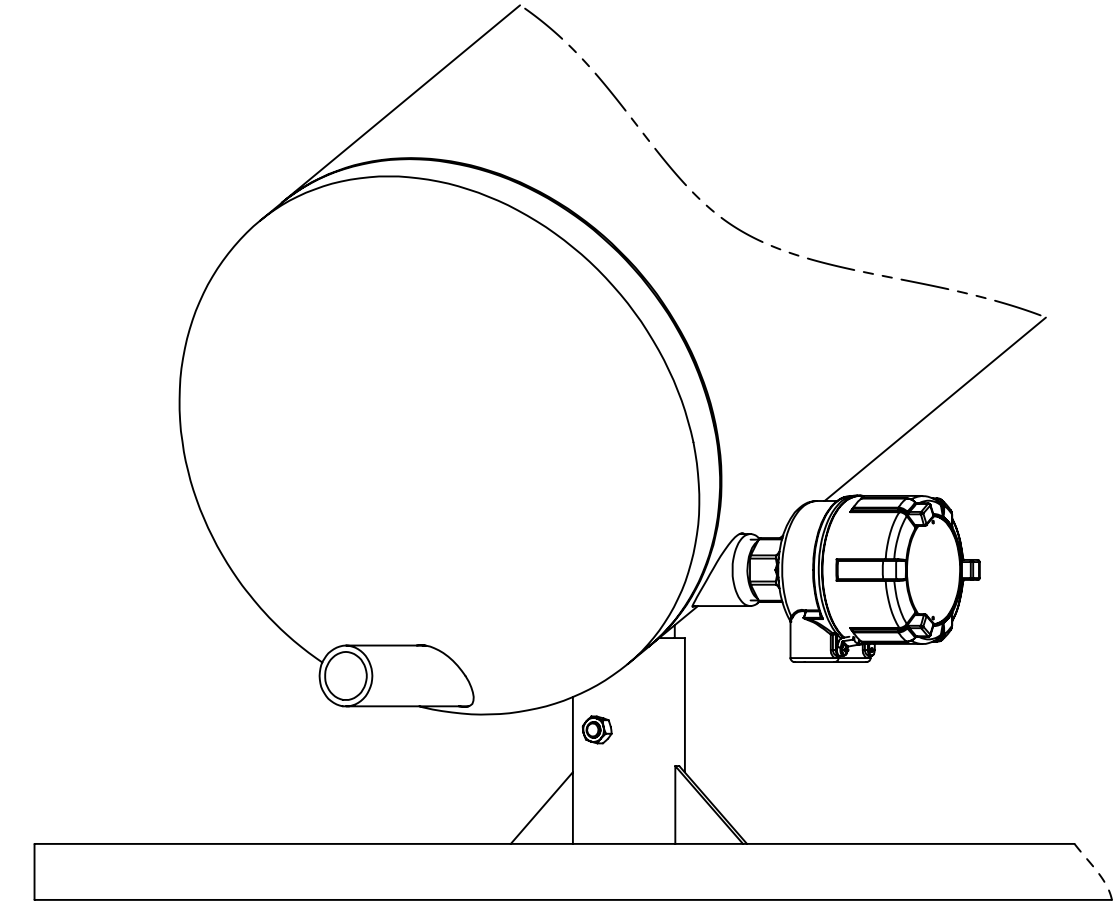


### OPTIONAL SMART PURGE

UNIT SHOWN WITH OPTIONAL SMART PURGE SENSOR ASSEMBLY INSTALLED (ORDER SEPARATELY)

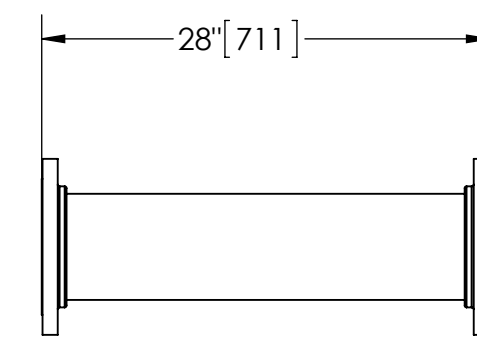

### OPTIONAL FLANGED SPOOL

MODEL FS-06 (AVAILABLE SEPARATELY)  
REQUIRED FOR REMOVAL OF TOP ASSEMBLY

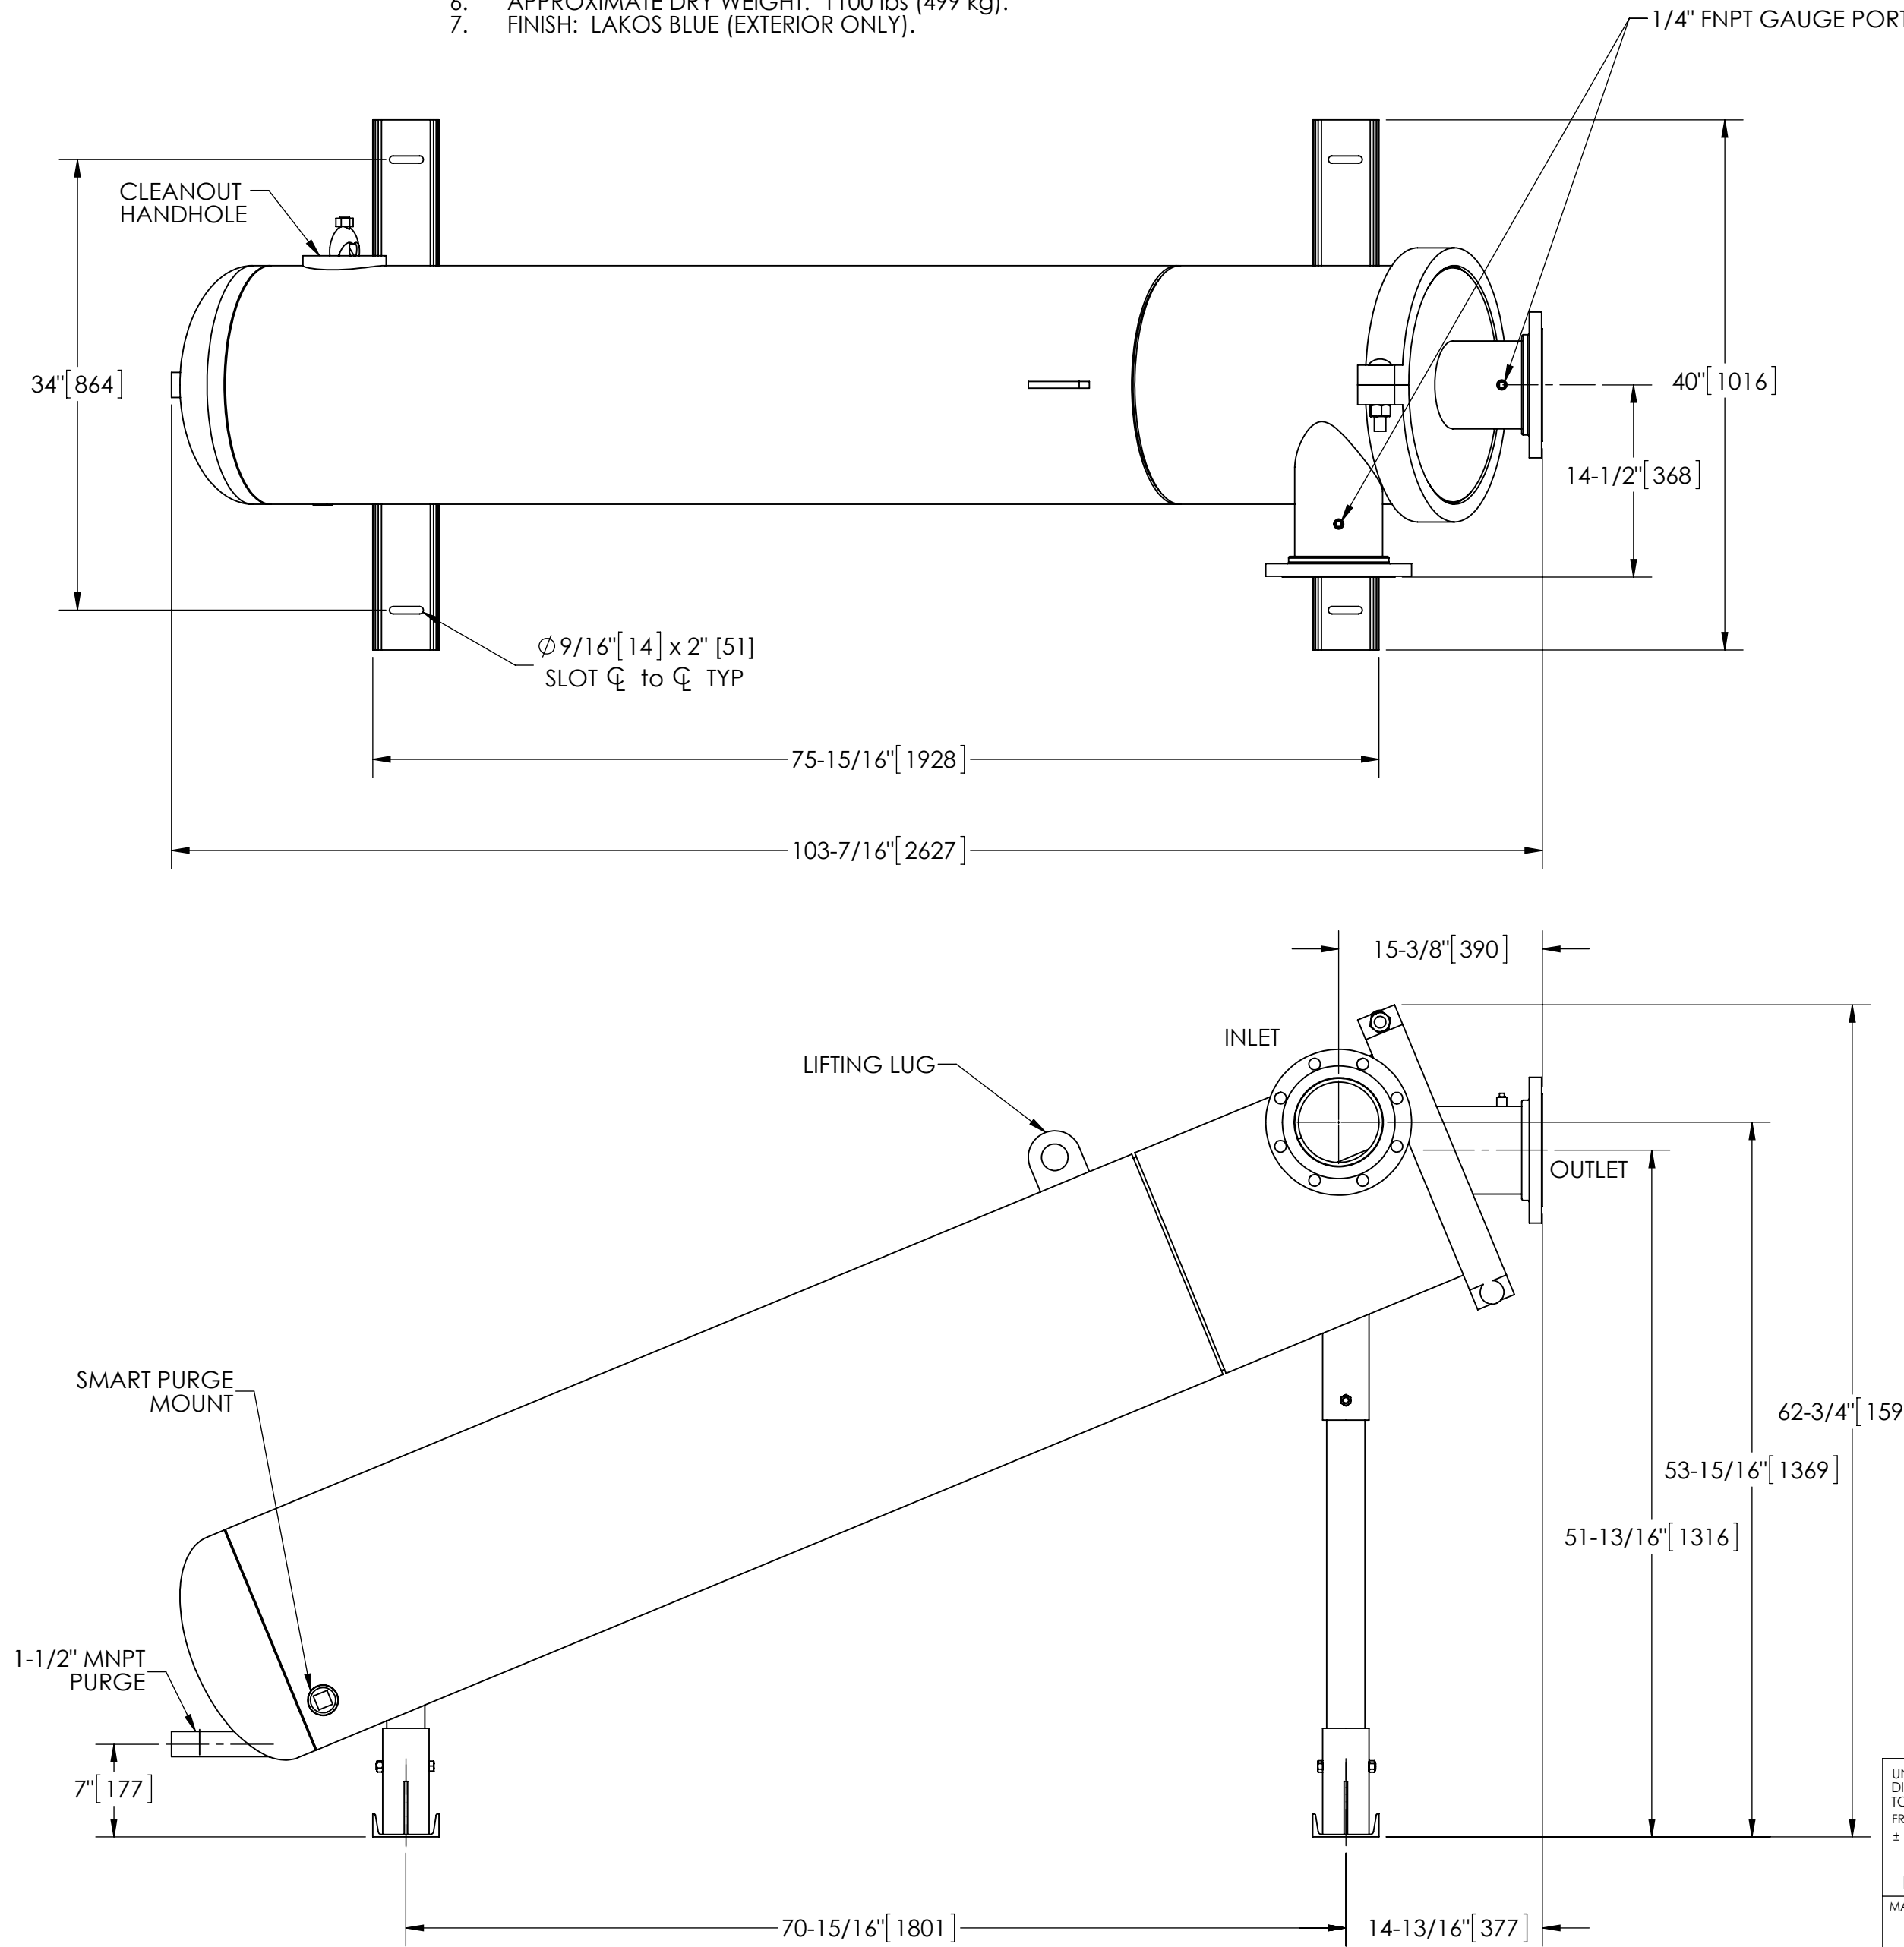

UNLESS OTHERWISE SPECIFIED:  
DIMENSIONS ARE IN: INCHES (mm)  
TOLERANCES ARE:

FRACTIONS	DECIMALS	ANGLES
$\pm 1/2$ "	.XX $\pm .01$	$\pm 1/4$ "
	.XXX $\pm .005$	
	.XXXX $\pm .0005$	

DO NOT SCALE DRAWING

MATERIAL	CLASS P-1 MILD CARBON STEEL
FINISH	LAKOS BLUE

ENGINEERED FOR:	STANDARD	
APPROVALS	DATE	
DRAWN	Cag	10/3/14
ENGR	-	-
MFG	-	-
WORK ORDER		QTY.

<b>LAKOS.</b>		CLAUDE LAVAL CORP. FRESNO, CALIFORNIA 93727 WWW.LAKOS.COM	
TITLE eJPX-0425-L, SEPARATOR 0425 eJPX LOW PRO, CARBON STEEL			
SCALE	MODEL NO.	DWG NO.	REV.
C 1:12		136470	01
	EST. WT.	SHEET	
	1100 lb	1 OF 1	

DWG NO. 136470  
SHEET 1 OF 1  
REV. 01