

EXCEPT AS OTHERWISE PROVIDED BY CONTRACT, THIS DRAWING AND SPECIFICATIONS SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF MATTER DEPICTED HEREIN WITHOUT THE EXPRESSED WRITTEN PERMISSION OF THE CLAUDE LAVAL CORPORATION, OR ITS ASSIGNEES.


NOTES:

1. INLET & OUTLET FLANGES ARE 2" (50 mm) 10K FF PER JIS B2220 REQUIRING 4X M20 BOLTS (BOLTS AND GASKETS NOT INCLUDED).
2. MAXIMUM PRESSURE: 14 bar (203 psi).
3. MAXIMUM TEMPERATURE: 110°C (230°F).
4. PRESSURE LOSS: .34-1.24 bar AT RATED FLOW.
5. RATED FLOW: 18.2-34.0 m<sup>3</sup>/hr.
6. APPROXIMATE DRY WEIGHT: 110 kg.
7. FINISH: LAKOS BLUE (EXTERIOR ONLY).

REVISION HISTORY				
ZONE	REV	DESCRIPTION	DATE	APPROVED


## SUBMITTAL DRAWING

This drawing is submitted for spatial consideration only. Do not pre-plumb to these dimensions.

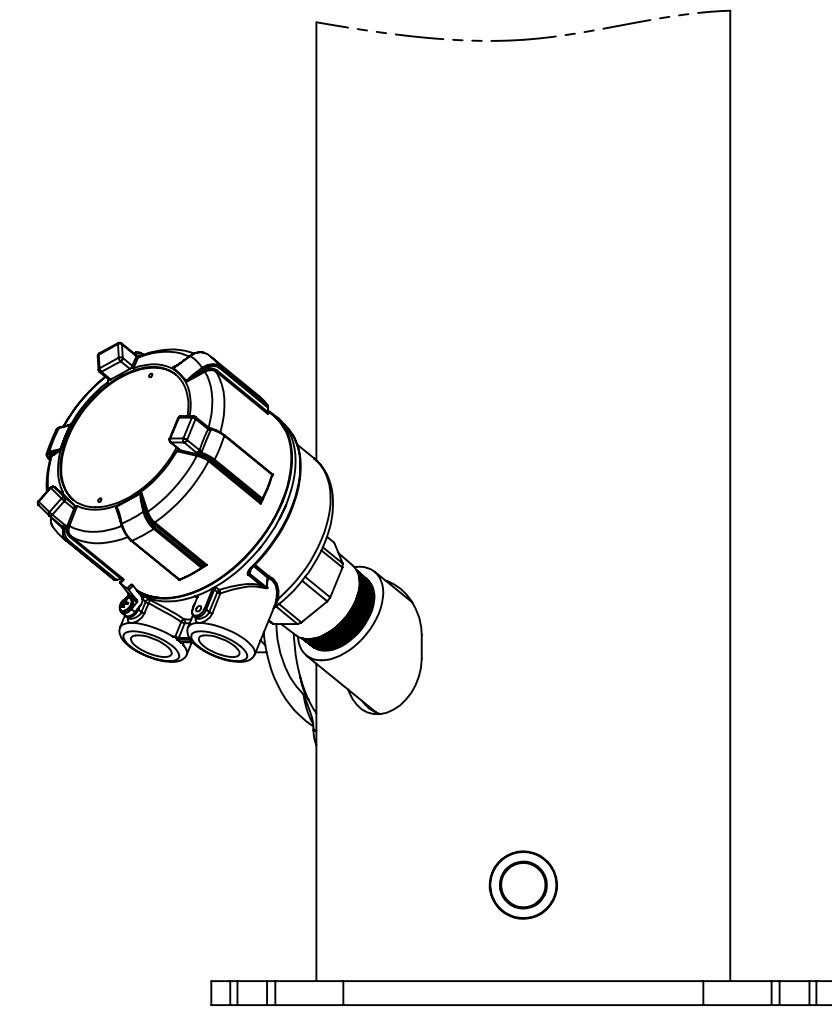





### OPTIONAL SMART PURGE

UNIT SHOWN WITH SMART PURGE ASSEMBLY INSTALLED (ORDER SEPARATELY)

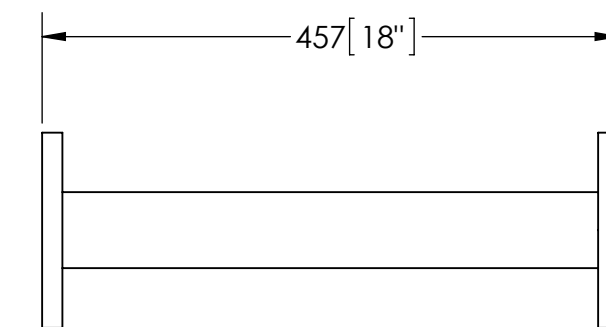

### OPTIONAL FLANGED SPOOL

MODEL FS-02/JIS (AVAILABLE SEPARATELY) REQUIRED FOR REMOVAL OF TOP ASSEMBLY

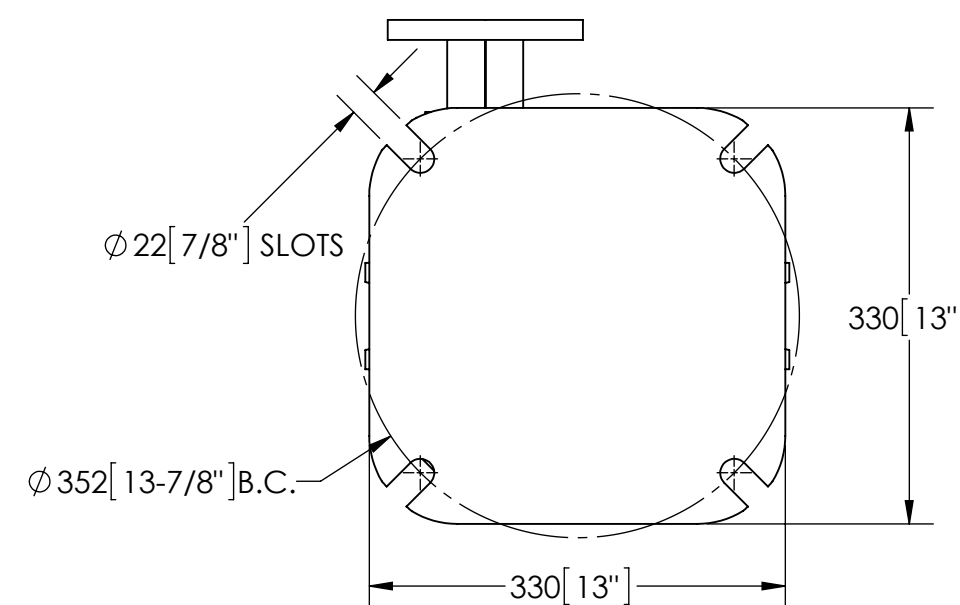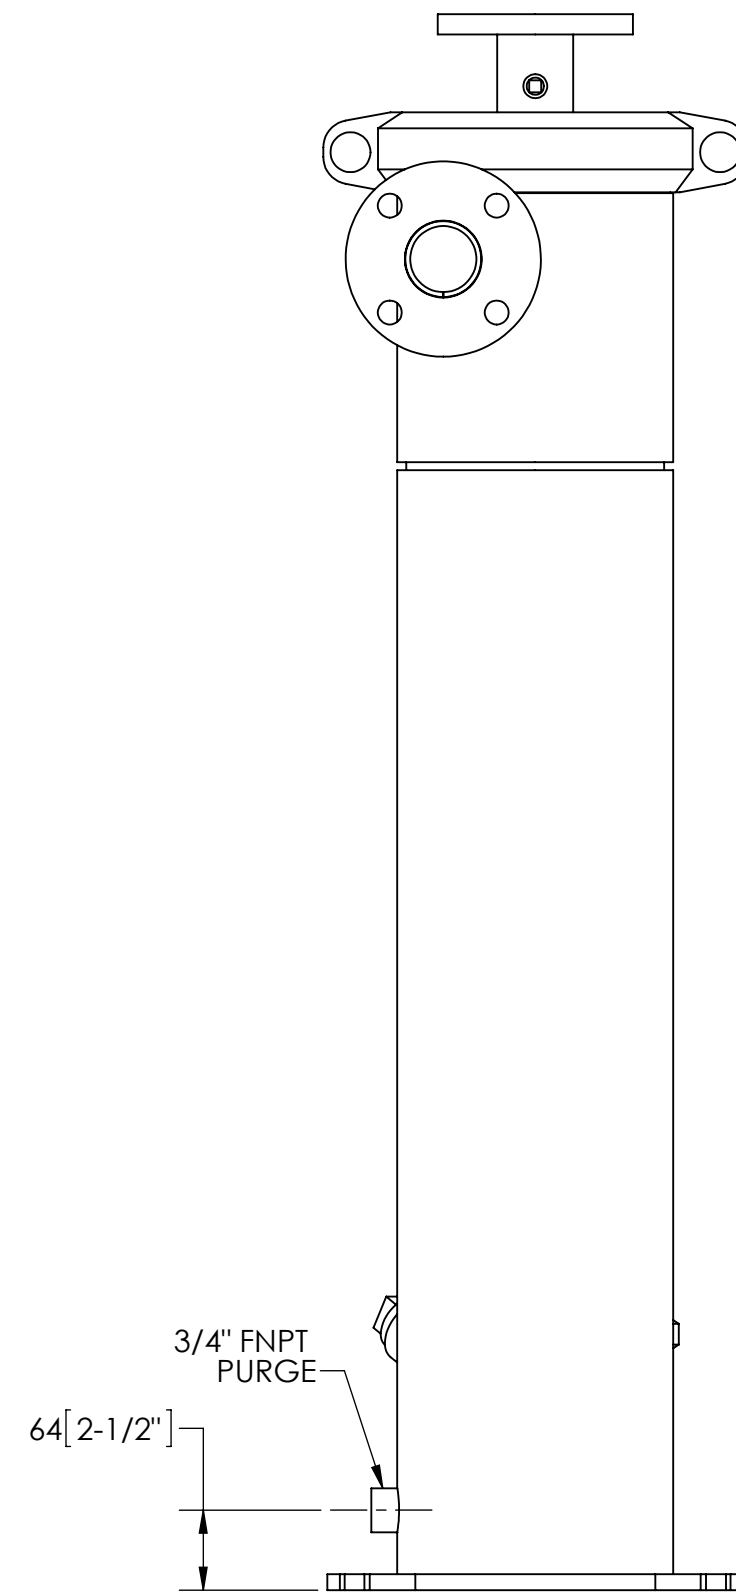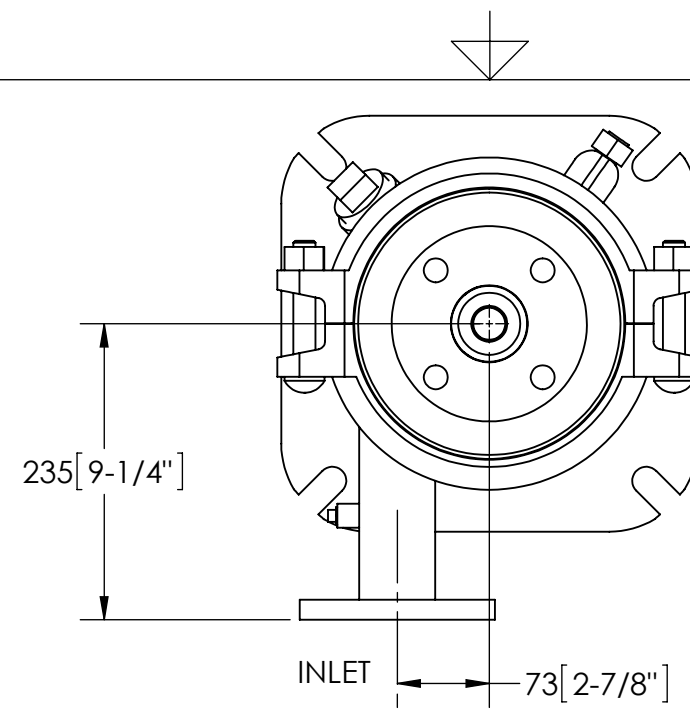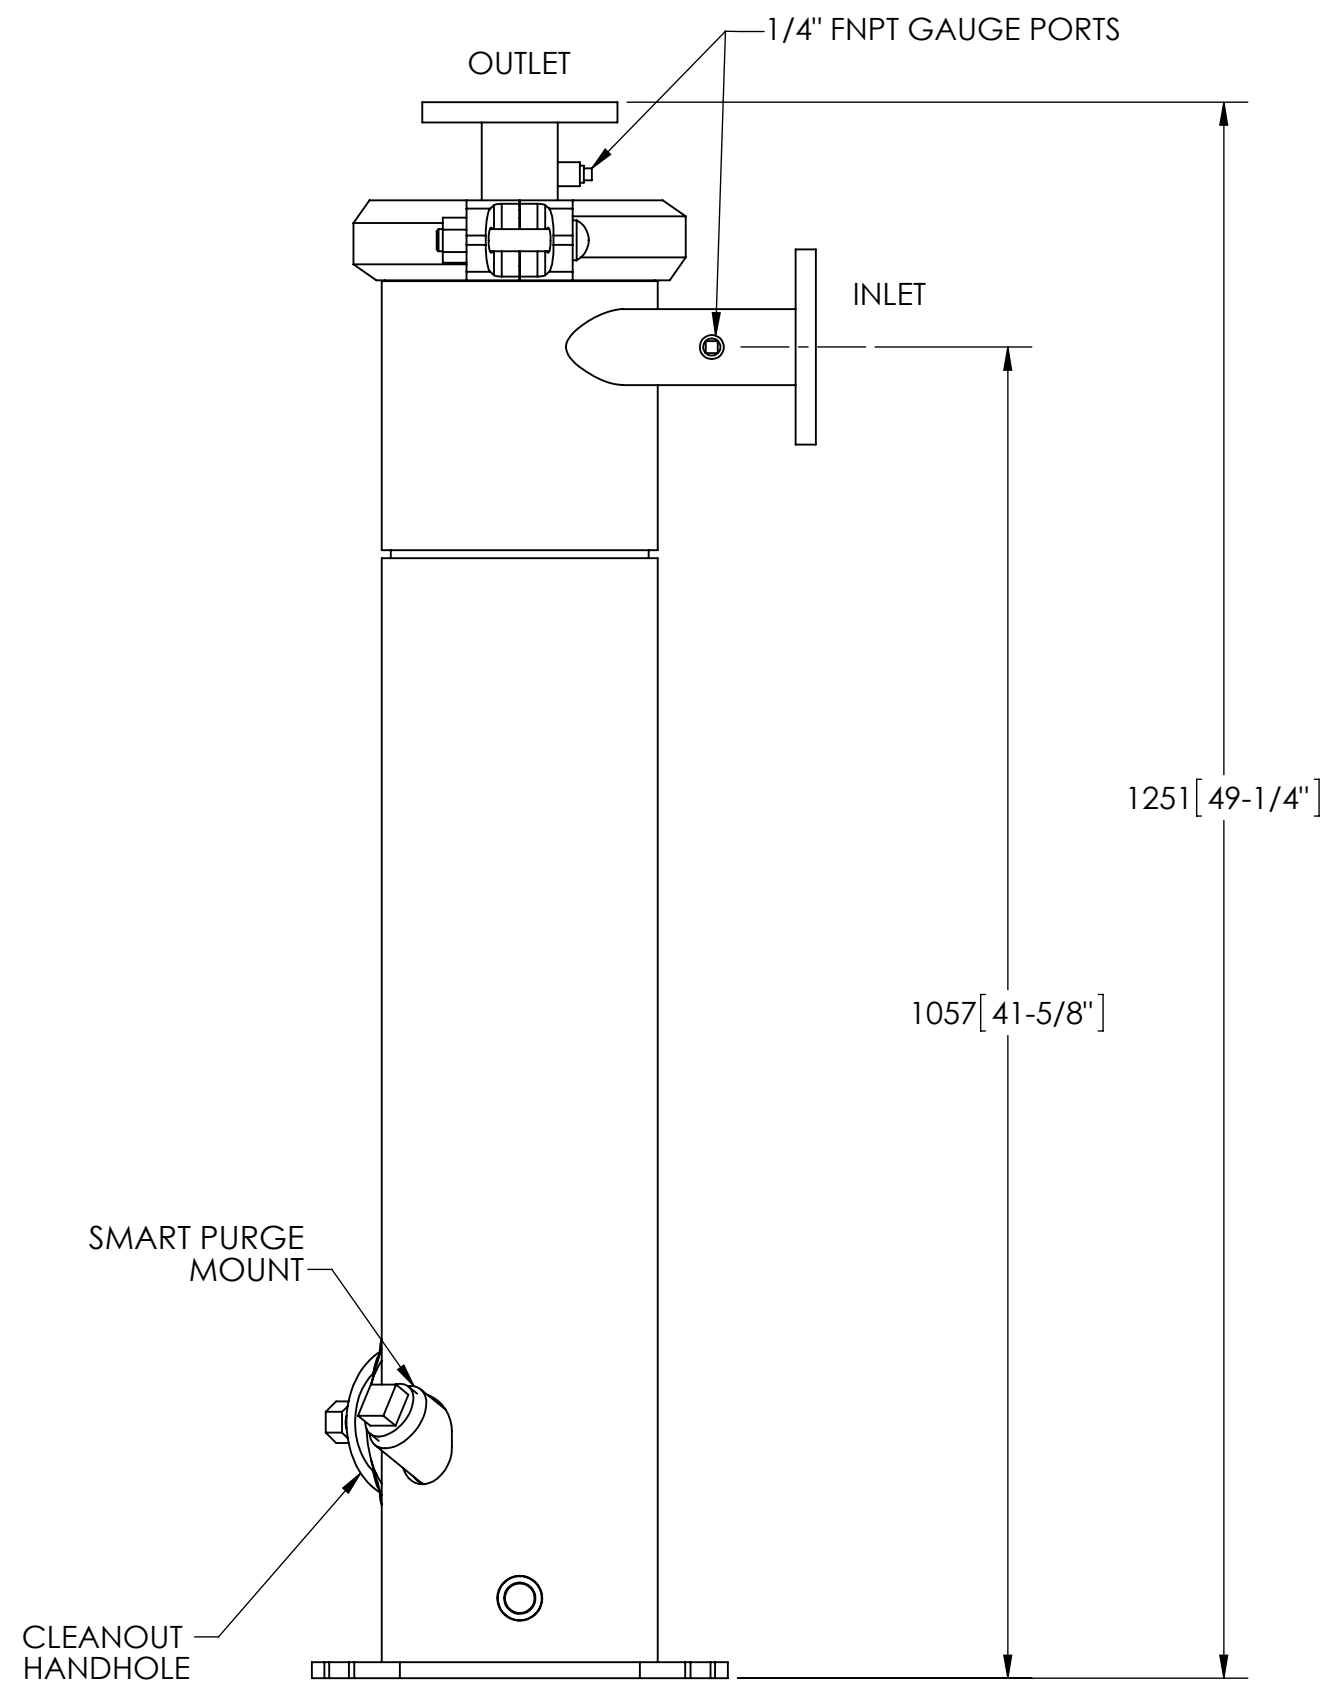

THIS DRAWING HAS BEEN GENERATED AND IS MAINTAINED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY AN APPROVED ENGINEERING CHANGE ORDER (ECO). PAPER COPIES ARE UNCONTROLLED.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN: mm (INCHES) TOLERANCES ARE: DECIMALS    ANGLES 0 ± .6        ± 1/4° 0.0 ± 0.5 0.00 ± 0.05	ENGINEERED FOR: <b>JIS FLANGES</b>	
	APPROVALS	DATE
	DRAWN    Cag	9/30/14
	MATERIAL    CLASS P-1 MILD CARBON STEEL	ENGR    -
FINISH    LAKOS BLUE	MFG    -	
	WORK ORDER	QTY.

<b>LAKOS</b>		CLAUDE LAVAL CORP. FRESNO, CALIFORNIA 93727 WWW.LAKOS.COM	
TITLE eJPX-0080-V/JIS, SEPARATOR 0080 eJPX VERT JIS FLG, CARBON STEEL			
SIZE C	MODEL NO.	DWG NO. 137160-JIS	REV. 01
SCALE 1:6	EST. WT. 227 lb	SHEET 1 OF 1	