

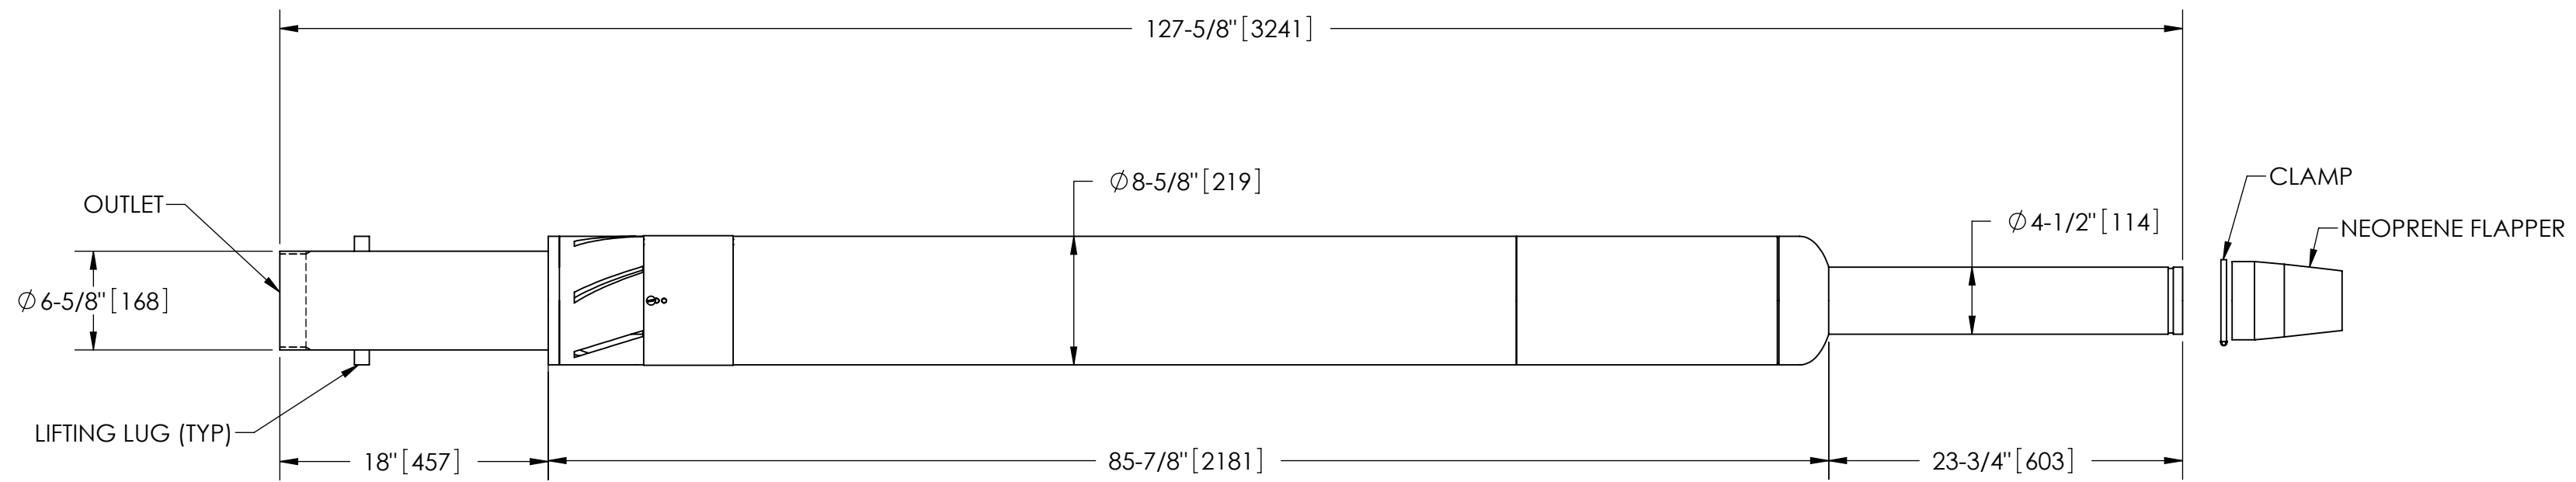
EXCEPT AS OTHERWISE PROVIDED BY CONTRACT, THIS DRAWING AND SPECIFICATIONS SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF MATTER DEPICTED HEREIN WITHOUT THE EXPRESSED WRITTEN PERMISSION OF THE CLAUDE LAVAL CORPORATION, OR ITS ASSIGNEES.

NOTES:

1. OUTLET: 6" NPT PIPE.
2. RATED FLOW: 325-650 gpm (74-148 m³/hr).
3. MINIMUM WELL I.D.: 10-3/4" (273 mm).
4. HEAD LOSS: 9-14 ft (2.7-4.3 m).
5. MINIMUM SUBMERGENCE: 30 ft (9.2 m).
6. APPROXIMATE DRY WEIGHT: 260 lbs (118 kg).
7. FINISH: LAKOS GREEN (EXTERIOR ONLY).
8. IF UNIT IS NOT DIRECTLY CONNECTED TO PUMP INTAKE, SHROUD OR PACKERS ARE REQUIRED.



THIS DRAWING HAS BEEN GENERATED AND IS MAINTAINED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY AN APPROVED ENGINEERING CHANGE ORDER (ECO). PAPER COPIES ARE UNCONTROLLED.

REVISIONS				
ECN	REV.	DESCRIPTION	DATE	APPROVED



SUBMITTAL DRAWING

This drawing is submitted for spatial consideration only. Do not pre-plumb to these dimensions.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN: INCHES [mm] TOLERANCES ARE:		ENGINEERED FOR: STANDARD		 CLAUDE LAVAL CORP. FRESNO, CALIFORNIA 93727 WWW.LAKOS.COM		 LAVAL UNDERGROUND SURVEYS		
FRACTIONS ± 1/4"	DECIMALS .XX ± .01 .XXX ± .005 .XXXX ± .0005	ANGLES ± 1/4°	APPROVALS	DATE	TITLE PPS-G, SEPARATOR 325-650 gpm, CARBON STEEL			
DO NOT SCALE DRAWING			DRAWN AMF	3/4/09	SIZE C			
MATERIAL CLASS P-1 MILD CARBON STEEL			ENGR -	-	MODEL NO.		DWG NO. 107639	REV. D
FINISH SEE NOTES			MFG -	-	SCALE 1:10		EST. WT. 260 lb	SHEET 1 OF 1
			WORK ORDER	QTY.				

DWG. NO. 107639 SHEET 1 REV. D