
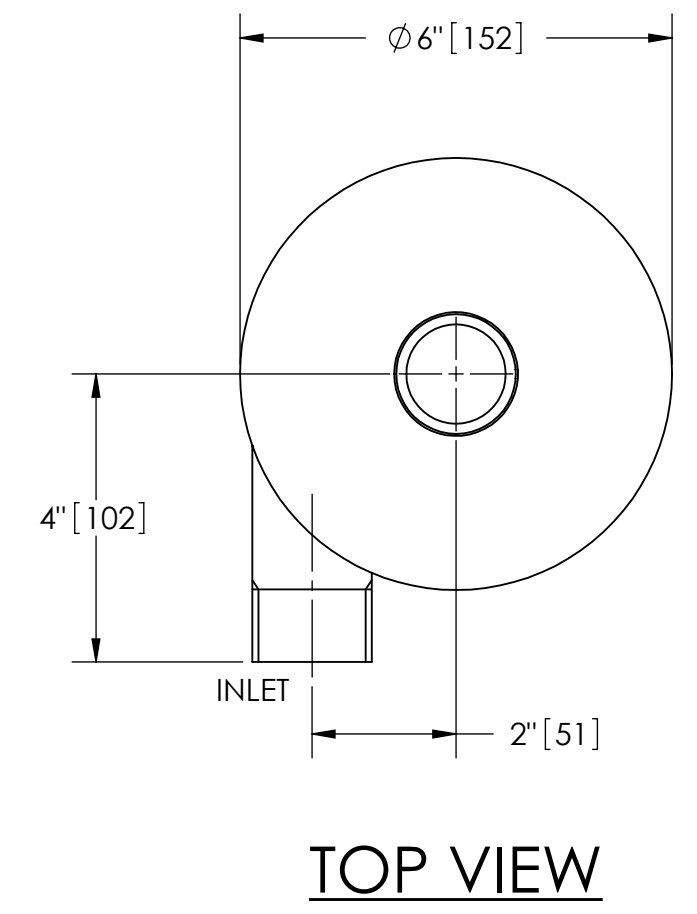


EXCEPT AS OTHERWISE PROVIDED BY CONTRACT, THIS DRAWING AND SPECIFICATIONS SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF MATTER DEPICTED HEREIN WITHOUT THE EXPRESSED WRITTEN PERMISSION OF THE CLAUDE LAVAL CORPORATION, OR ITS ASSIGNEES.

THIS DRAWING HAS BEEN GENERATED AND IS MAINTAINED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY AN APPROVED ENGINEERING CHANGE ORDER (ECO). PAPER COPIES ARE UNCONTROLLED.

REVISIONS				
ECN	REV.	DESCRIPTION	DATE	APPROVED

- NOTES:
1. INLET & OUTLET ARE 1-1/4" MNPT PIPE.
 2. MAXIMUM PRESSURE: 150 psi (10.3 bar).
 3. MAXIMUM TEMPERATURE: 180°F (82.2°C).
 4. PRESSURE LOSS: 3-12 psid (.2-.8 bar) AT RATED FLOW.
 5. RATED FLOW: 28-48 gpm (6.5-11 m³/hr).
 6. APPROXIMATE DRY WEIGHT: 55 lbs (25 kg).
 7. FINISH: GLASS BLAST (EXTERIOR ONLY).

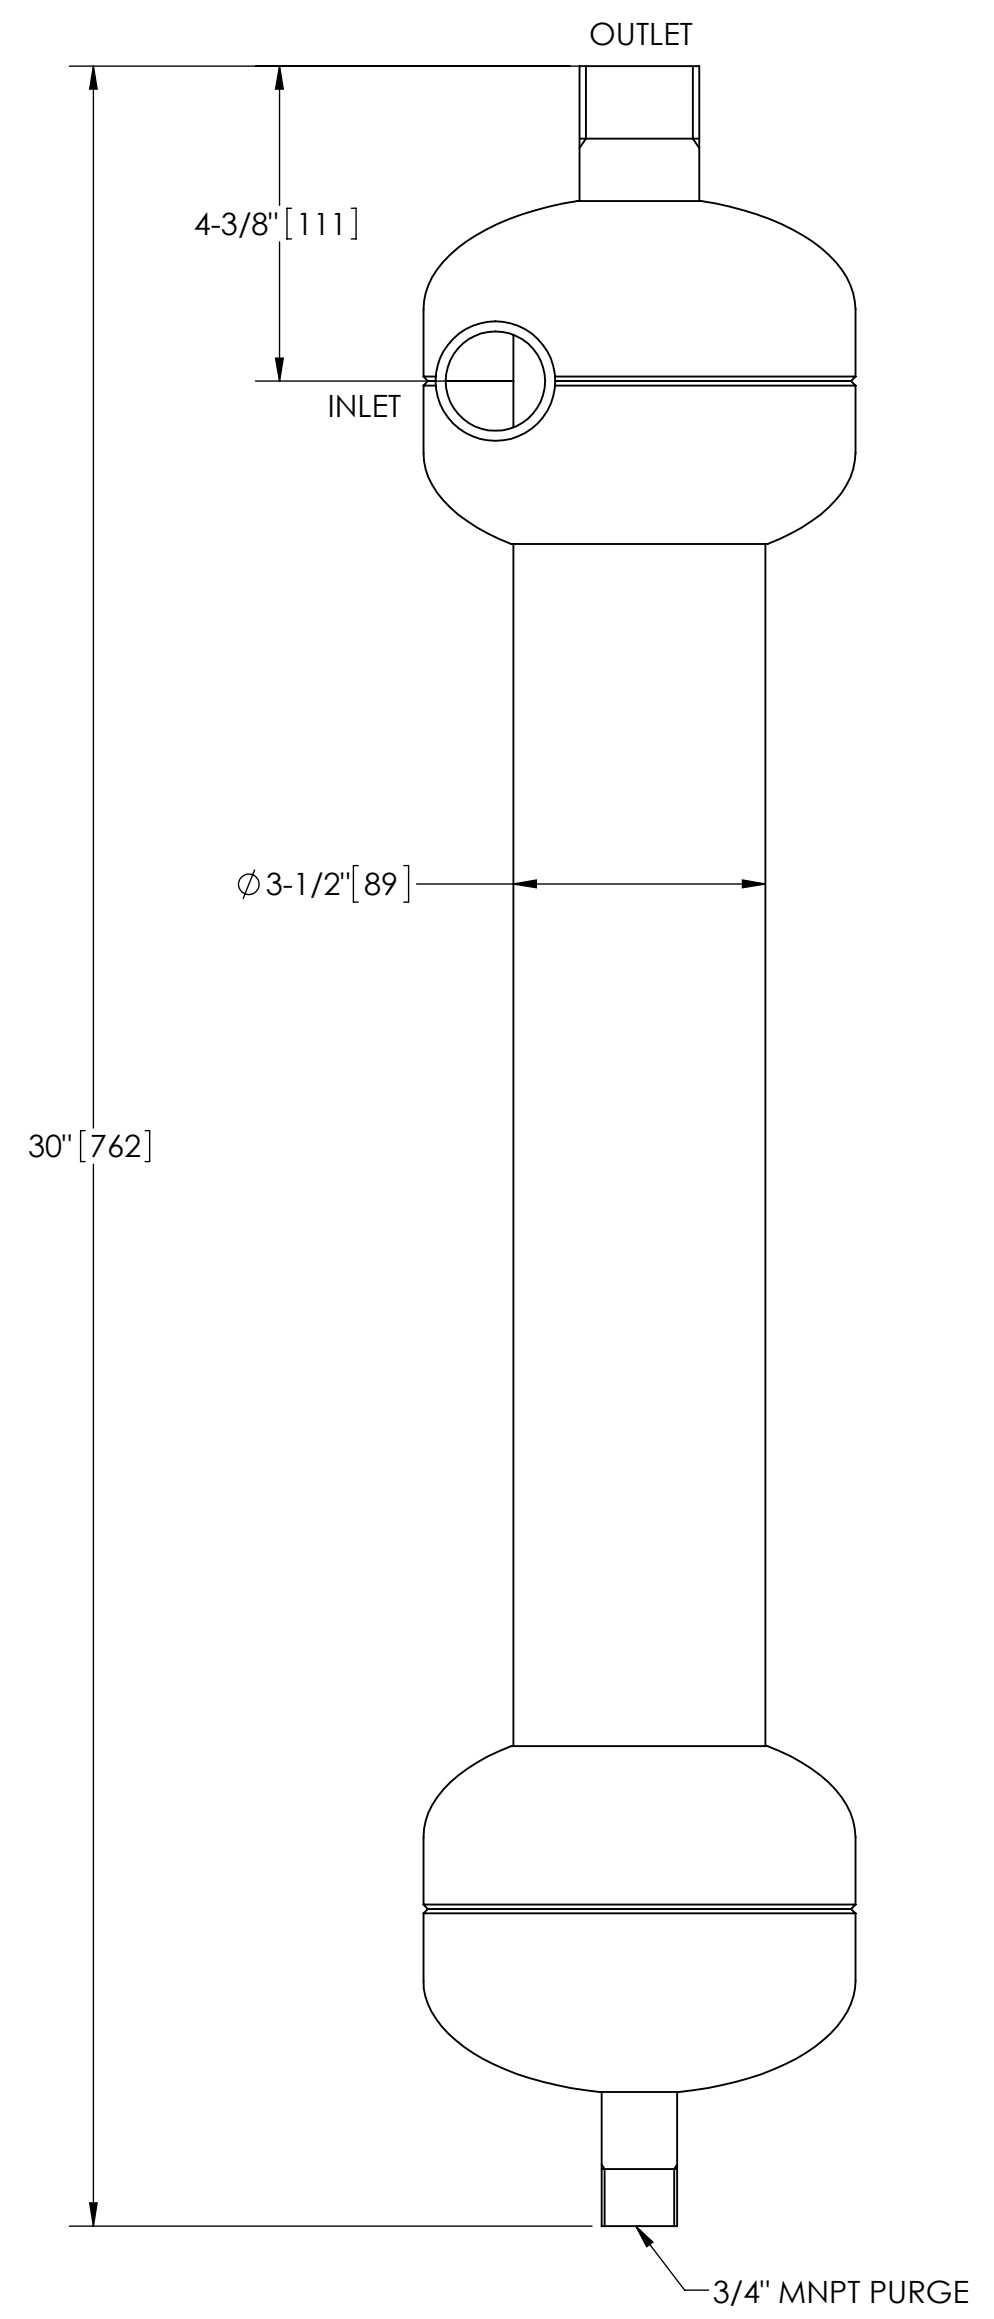

SUBMITTAL DRAWING
 This drawing is submitted for spatial consideration only. Do not pre-plumb to these dimensions.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN: INCHES (mm) TOLERANCES ARE:		ENGINEERED FOR: STANDARD		CLAUDE LAVAL CORP. FRESNO, CALIFORNIA 93727 WWW.LAKOS.COM	
FRACTIONS ± 1"	DECIMALS .XX ± .01 .XXX ± .005 .XXXX ± .0005	ANGLES ± 1/4°	APPROVALS	DATE	TITLE ILS-0125, SEPARATOR, 28-48 gpm, 316L SS
DO NOT SCALE DRAWING			DRAWN AMF	8/4/10	
MATERIAL TYPE 316L STAINLESS STEEL			ENGR -	-	SIZE C
FINISH GLASS BLAST			MFG -	-	MODEL NO.
			WORK ORDER	QTY.	DWG NO. 100295
					EST. WT. 55 lb
					SHEET 1 OF 1

DWG. NO. 100295
 SHEET 1
 REV. C