
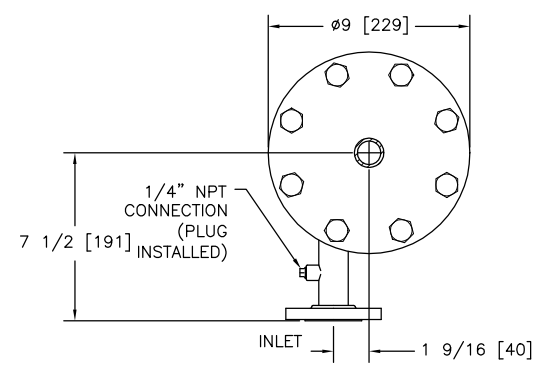


EXCEPT AS OTHERWISE PROVIDED BY CONTRACT, THIS DRAWING AND SPECIFICATIONS SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF MATTER DEPICTED HEREIN WITHOUT THE EXPRESSED WRITTEN PERMISSION OF THE CLAUDE LAVAL CORPORATION, OR ITS ASSIGNEES.

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

THIS DRAWING HAS BEEN GENERATED AND IS MAINTAINED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY AN APPROVED ENGINEERING CHANGE ORDER (ECO). PAPER COPIES ARE UNCONTROLLED.

- NOTES:
1. INLET & OUTLET FLANGES ARE 1" 150# RF PER ANSI B16.5 REQUIRING 4X 1/2" x 2-1/4" LONG BOLTS (BOLTS AND GASKETS NOT INCLUDED).
 2. MAXIMUM PRESSURE: 100 psi (689 kPa).
 3. MAXIMUM TEMPERATURE: 400°F (204°C).
 4. PRESSURE LOSS: 3-12.0 psi (21-83 kPa) AT RATED FLOW.
 5. RATED FLOW: 20-40 gpm (4.5-9.08 m³/hr).
 6. APPROXIMATE DRY WEIGHT: 144 lbs (66 kg).
 7. FINISH: GLASSBLAST (EXTERIOR ONLY).
 8. THREADED CONNECTIONS SEALED USING TEFLON PASTE SEALANT JOHN CRANE JC-30 OR EQUIVALENT.
 9. GASKET: SPIRAL WOUND, 304 SS W/PTFE FILLER.

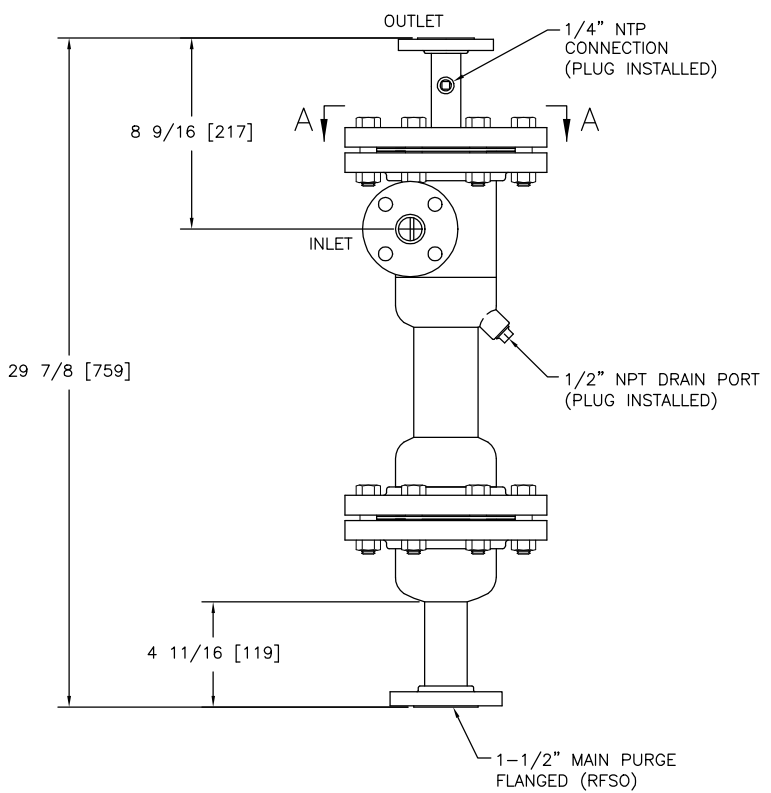

SECTION A-A

SUBMITTAL DRAWING

This drawing is submitted for special consideration only. Do not pre-plumb to these dimensions. Certified drawings available upon request.

<small>UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES (mm) TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ±1/4" .005 .01 ±1/4" DO NOT SCALE DRAWING MATERIAL TYPE 304L STAINLESS STEEL FINISH GLASSBLAST WORK ORDER</small>	<small>ENGINEERED FOR:</small> COOKING OIL		<small>APPROVALS</small> DRAWN PMT 5/12/01 REVIEWED NAC 6/8/01 ENGR β 6/8/01 QTY.		LAKOS CLAUDE LAVAL CORP. 1365 N. CLOVIS AVE. FRESNO, CALIFORNIA 93727		<small>LAVAL UNDERGROUND SUPPLY</small>
	<small>TITLE</small> CSX-0020-HV/S, SEPARATOR, 1" CSX VERTICAL, STAINLESS STEEL		<small>SCALE</small> 1/4"		<small>MODEL NO.</small> 118172		
<small>EST. WT.</small> 144			<small>DWG NO.</small> 118172		<small>REV.</small> 1 OF 1		<small>SHEET</small> 1 OF 1

DWG NO. 118172
 SHEET 1 OF 1