EXCEPT AS OTHERWISE PROVIDED BY CONTRACT, THIS DRAWING AND SPECIFICATIONS SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF MATTER DEPICTED HEREIN WITHOUT THE EXPRESSED WRITTEN PERMISSION OF THE CLAUDE LAVAL CORPORATION, OR ITS ASSIGNEES.

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
B-2	A	ECO # 1015	12/18/95	

THIS DRAWING HAS BEEN GENERATED AND IS MAINTAINED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY AN APPROVED ENGINEERING CHANGE ORDER (ECO).
PAPER COPIES ARE UNCONTROLLED.

NOTES:

1. INLET & OUTLET IS 1-1/2" 150# MPT.
2. MAXIMUM PRESSURE: 150 psi. (1034 kPa).
3. MAXIMUM TEMPERATURE: 180°F (82.2°C).
4. PRESSURE LOSS: 5.0-12.0 psid [34.47-82.74 kPa] AT RATED FLOW.
5. RATED FLOW: 45-70 gpm (10-16 m^3/hr).
6. APPROXIMATE DRY WEIGHT: 26 lbs. (11.8 kg.).

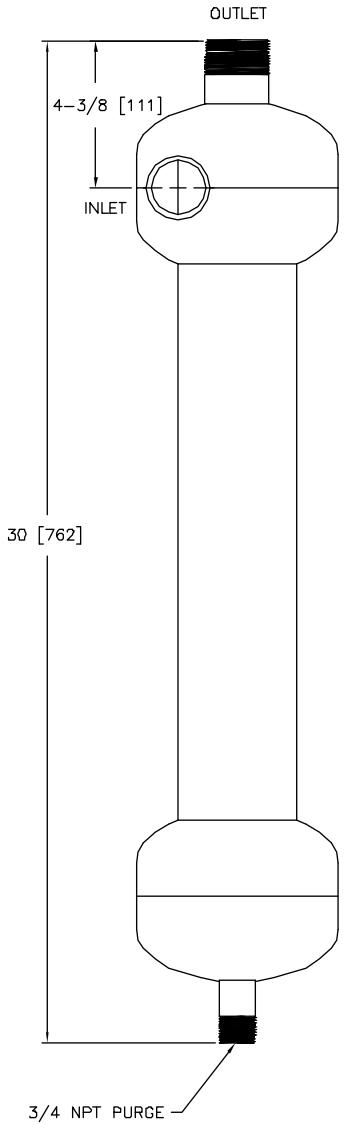

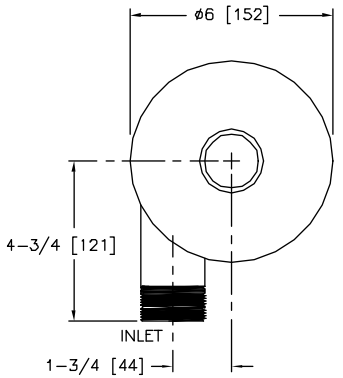

TOP VIEW

SUBMITTAL DRAWING

This drawing is submitted for spacial consideration only. Do not pre-plumb to these dimensions. Certified drawings available upon request.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN: INCHES [mm] TOLERANCES ARE: FRACTIONS ±1/4 DECIMALS .XX ±.01 .XXX ±.005 .XXXX ±.0005 ANGLES ±1/4° DO NOT SCALE DRAWING	ENGINEERED FOR: STANDARD	CLAUDE LAVAL CORP. 1365 N. CLOVIS AVE. FRESNO, CALIFORNIA 93727	LAVAL UNDERGROUND SURVEYS
MATERIAL: CLASS P-1 MILD CARBON STEEL	APPROVALS / DATE	TITLE: ILB-0150, SEPARATOR, 1-1/2 NPT INLINE, CS	
	DRAWN: R. JONES 5/17/95		
	REVIEWED: B 3/27/00		