
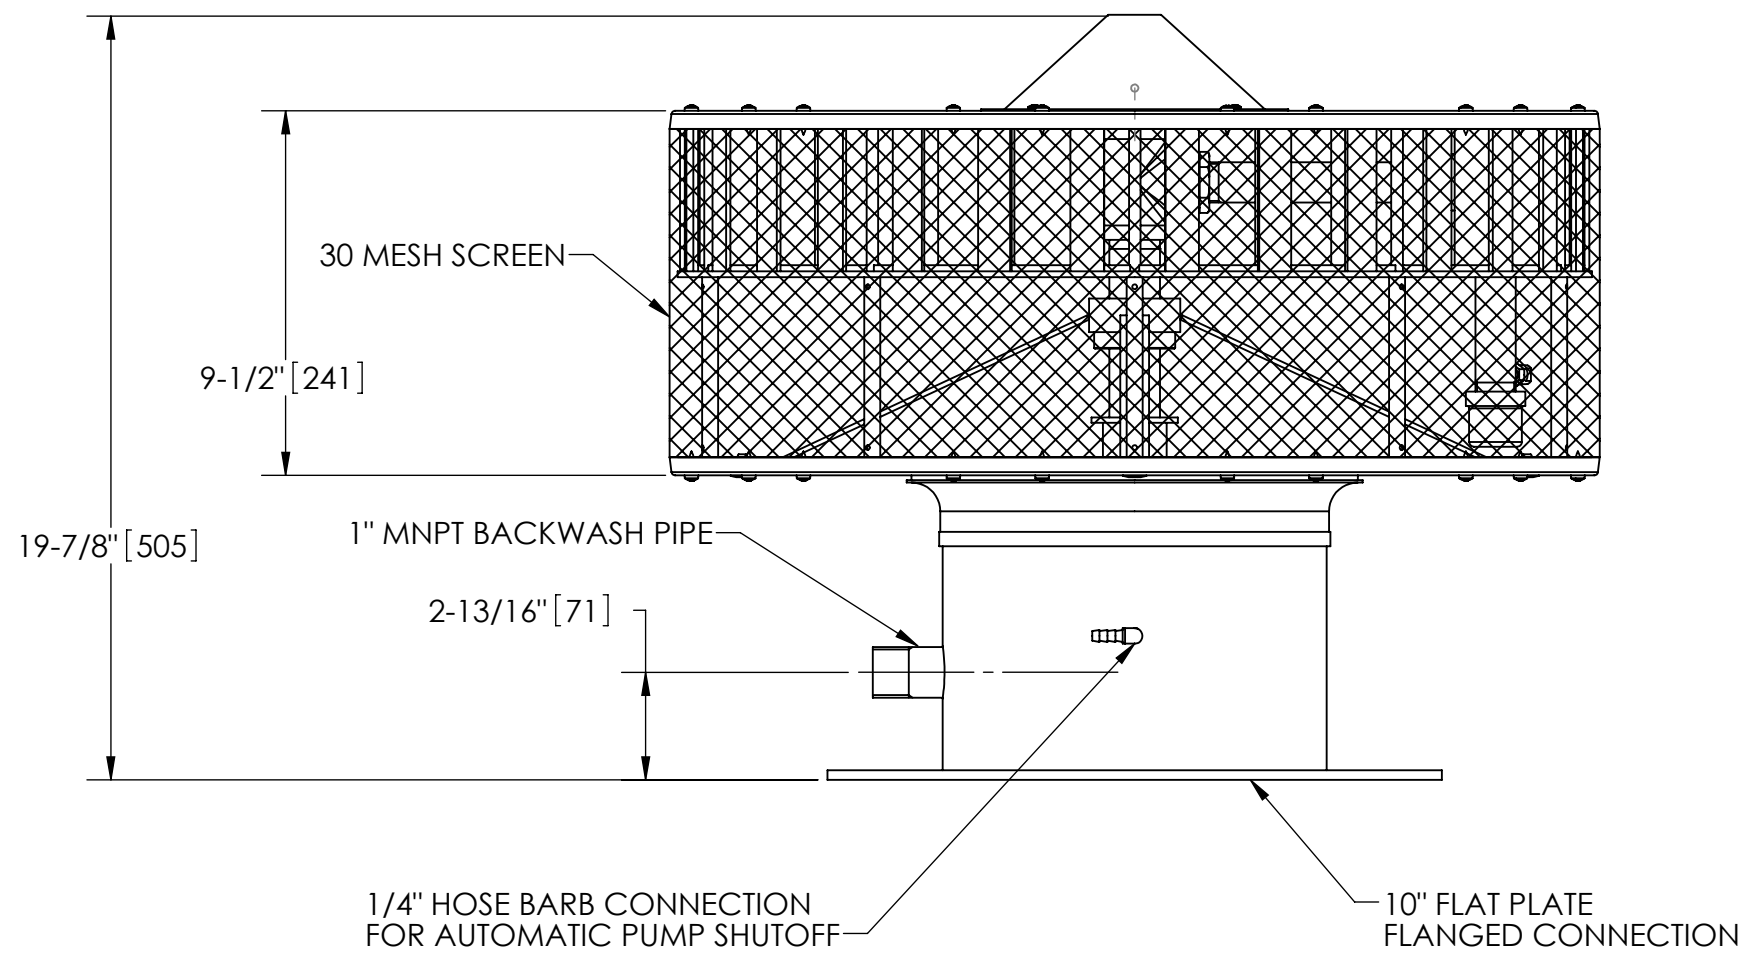


EXCEPT AS OTHERWISE PROVIDED BY CONTRACT, THIS DRAWING AND SPECIFICATIONS SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF MATTER DEPICTED HEREIN WITHOUT THE EXPRESSED WRITTEN PERMISSION OF THE CLAUDE LAVAL CORPORATION, OR ITS ASSIGNEES.


NOTES:

1. OUTLET FLANGE IS 10" ANSI B16.5 HOLE PATTERN REQUIRING 10X 7/8" BOLTS (BOLTS AND GASKETS NOT INCLUDED).
2. REQUIRED BACKWASH PRESSURE: 65-100 psi (4.1-6.9 kPa).
3. APPROXIMATE BACKWASH FLOW AT PROPER PRESSURE: 12 gpm. (2.5m³/hr)
4. MAXIMUM FLOWRATE: 450 gpm (105 m³/hr).
5. APPROXIMATE DRY WEIGHT: 49 lb (22 kg).
6. FINISH: GLASSBLAST

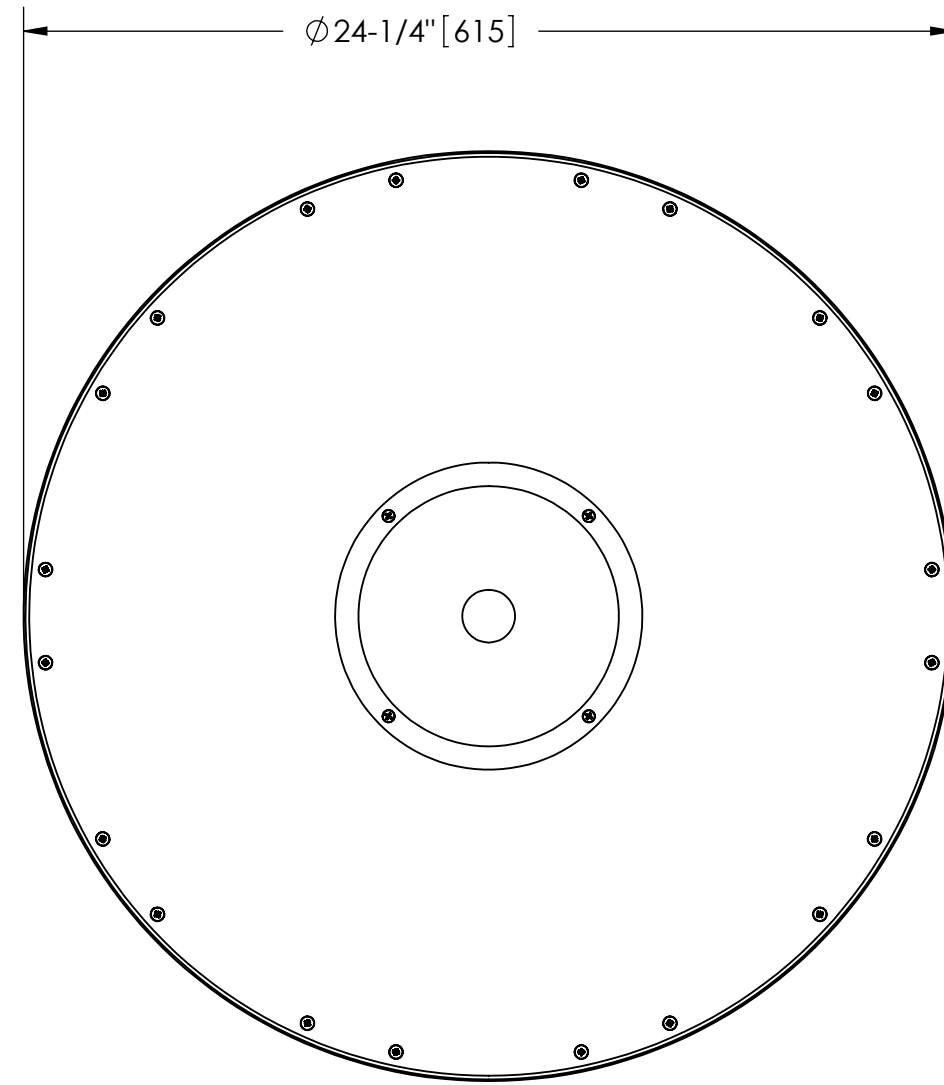


REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED

THIS DRAWING HAS BEEN GENERATED AND IS MAINTAINED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY AN APPROVED ENGINEERING CHANGE ORDER (ECO). PAPER COPIES ARE UNCONTROLLED.

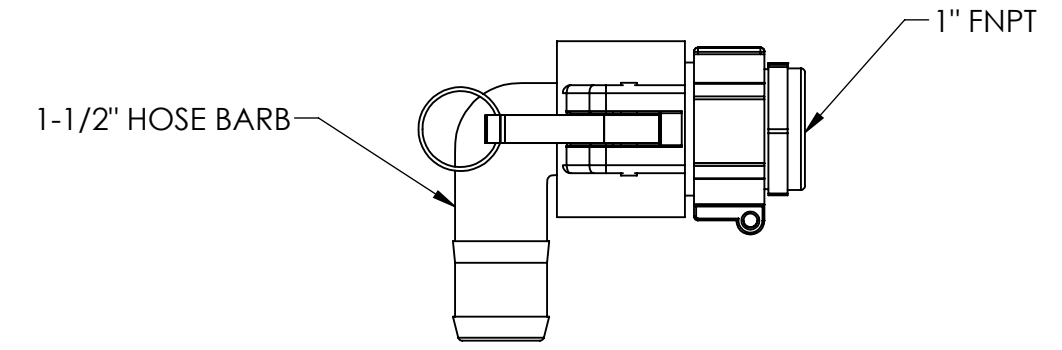

1-1/2" 90° QUICK DISCONNECT ADAPTER (INCLUDED) SCALE 1:3

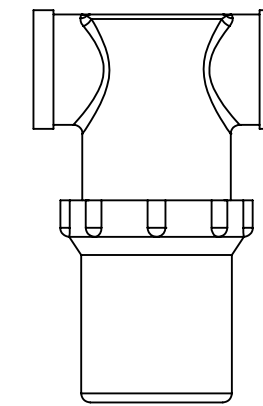

1-1/2" INLINE STRAINER (INCLUDED) 1:4

SUBMITTAL DRAWING

This drawing is submitted for spatial consideration only. Do not pre-plumb to these dimensions.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN: INCHES [mm] TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± 1/4" .XX ± .01 ± 1/4° .XXX ± .005 .XXXX ± .0005		ENGINEERED FOR: STANDARD		CLAUDE LAVAL CORP. FRESNO, CALIFORNIA 93727 WWW.LAKOS.COM		LAVAL UNDERGROUND SURVEYS	
DO NOT SCALE DRAWING	APPROVALS	EL	DATE	TITLE PC92410E, PC SCREEN, 450 gpm, CARBON STEEL EPOXY			
MATERIAL PER LAKOS SPECS	ENGR	-	-	SIZE	MODEL NO.	DWG NO.	REV.
FINISH SEE NOTES	MFG	-	-	C		106845	01
	WORK ORDER		QTY.	SCALE	1:5	EST. WT.	49 lb
						SHEET	1 OF 1

DWG NO. 106845
SHEET REV. 01