


EXCEPT AS OTHERWISE PROVIDED BY CONTRACT, THIS DRAWING AND SPECIFICATIONS SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF MATTER DEPICTED HEREIN WITHOUT THE EXPRESSED WRITTEN PERMISSION OF THE CLAUDE LAVAL CORPORATION, OR ITS ASSIGNEES.

REVISIONS				
ECN	REV.	DESCRIPTION	DATE	APPROVED

NOTES:

1. OUTLET: 8" (203mm) NPT PIPE.
2. RATED FLOW: 550-1110 gpm (125-252 m³/hr).
3. MINIMUM WELL I.D.: 13-1/4" (337 mm).
4. HEAD LOSS: 9-14 ft (2.7-4.3 m).
5. MINIMUM SBMERGENCE: 30 ft (9.2 m)
6. APPROXIMATE DRY WEIGHT: 313 lbs (142 kg).
7. FINISH: LAKOS GREEN (EXTERIOR ONLY).
8. IF UNIT IS NOT DIRECTLY CONNECTED TO PUMP INTAKE, SHROUD OR PACKERS ARE REQUIRED.

THIS DRAWING HAS BEEN GENERATED AND IS MAINTAINED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY AN APPROVED ENGINEERING CHANGE ORDER (ECO). PAPER COPIES ARE UNCONTROLLED.

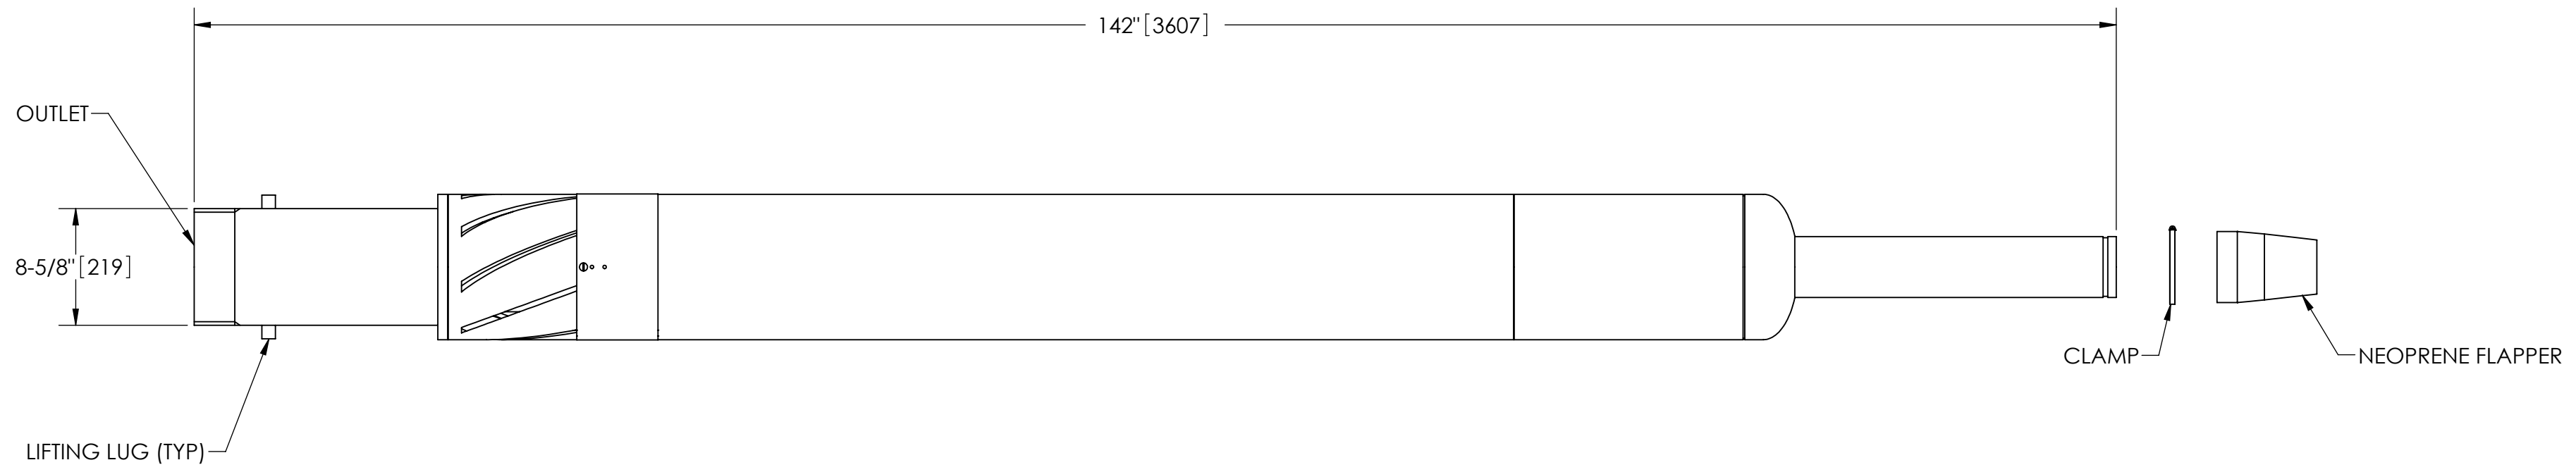

SUBMITTAL DRAWING

This drawing is submitted for spatial consideration only. Do not pre-plumb to these dimensions.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN: INCHES (mm) TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± 1/4" .XX ± .01 ± 1/4° .XXX ± .005 .XXXX ± .0005		ENGINEERED FOR: STANDARD		CLAUDE LAVAL CORP. FRESNO, CALIFORNIA 93727 WWW.LAKOS.COM		LAVAL UNDERGROUND SURVEYS	
DO NOT SCALE DRAWING		APPROVALS	DATE	TITLE			
MATERIAL CLASS P-1 MILD CARBON STEEL		DRAWN AMF	11/25/08	PPS-H, SEPARATOR			
FINISH SEE NOTES		ENGR JBI	11/25/08	550-1110 gpm, CARBON STEEL			
		MFG -	-	SIZE C	MODEL NO.	DWG NO. 107642	REV. C
		WORK ORDER	QTY.	SCALE 1:10	EST. WT. 313 lb	SHEET 1 OF 1	

DWG. NO. 107642 SHEET 1 REV. C