
	4		3	
	DRAWING AND SPECIFICATIONS SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF MATTER DEPICTED HEREIN WITHOUT THE EXPRESSED WRITTEN DEPLATISTION OF THE	HAS BEEN GENERATED AND IS Y A CAD SYSTEM. CHANGES SHALL RPORATED AS DIRECTED BY AN GINEERING CHANGE ORDER (ECO). OPIES ARE UNCONTROLLED.		
	NOTES:		Ø 1/2"[13] TYP	<pre></pre>
D	 INLET IS 4" PIPE (GROOVED). OUTLET IS 4" PIPE (GROOVED). PURGE OUTLET IS 3/4" NPT. MAXIMUM PRESSURE: 150 psi (10.3 bar). MAXIMUM FLUID TEMPERATURE: 140°F (60°C SPECIFIED FLOWRATE OF 280 gpm (64m³/hr) FINISH: AS ASSEMBLED. POWER REQUIREMENT: 3/60/460V. NEMA 4X MOTOR STARTER ENCLOSURE WITH SAFETEY DISCONNECT AND H.O.A. SWITCH. APPROXIMATE DRY WEIGHT: 456 lbs (207 kg) INLET/OUTLET VALVE KIT, MODEL TCV-0280 R 	•. { .	3/4"[19] TYP	
	12. FLOODED SUCTION REQUIRED.			9-1/4"[235]
	<u>COMPONENT LIST</u> (1) ELECTRICAL CONTROL BOX: 3/60/460V, W/1	20V TRANSFORMER.	-	(30"[762]) 3/8"[10]
С	 SEPARATOR: ILB-0350. PUMP: 5 HP, CENTRIFUGAL, TEFC, 1750 rpm, INLET/OUTLET PRESSURE GAUGES: 0-160 psi, PURGE EQUIPMENT: ABV2-07-120V. 			<u>TOP VIEW</u>
				(4)(4)(2)
\rightarrow				
В				
			5	
			ſ	
				FRONT VIEW SPOOL HIDDEN
А				
	SYSTEM MODELS POWER REQUIREMENT SYSTEM PART NO.			
	3/60/208V 187709-208			

STSTEM MODELS		
POWER REQUIREMENT	SYSTEM PART NO.	
3/60/208∨	187709-208	
3/60/230V	187709-230	
3/60/460V	187709-460	
3/60/575V	187709-575	
OTHER	SEE FACTORY	

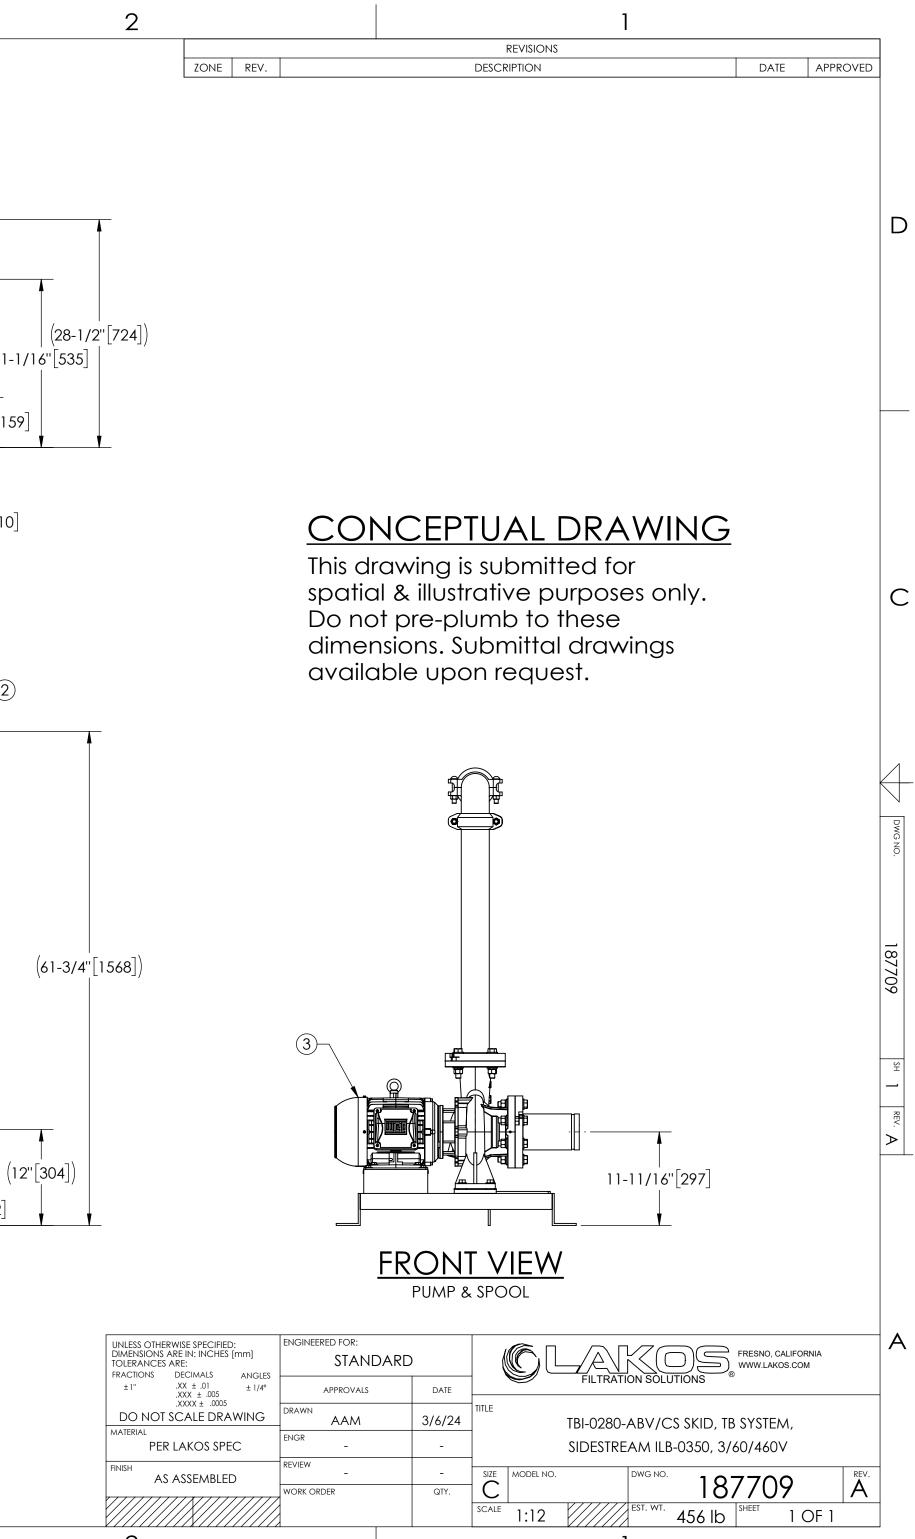

 \square