

4

3

2

1




EXCEPT AS OTHERWISE PROVIDED BY CONTRACT, THIS DRAWING AND SPECIFICATIONS SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF MATTER DEPICTED HEREIN WITHOUT THE EXPRESSED WRITTEN PERMISSION OF THE LAKOS CORPORATION, OR ITS ASSIGNEES.

THIS DRAWING HAS BEEN GENERATED AND IS MAINTAINED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY AN APPROVED ENGINEERING CHANGE ORDER (ECO). PAPER COPIES ARE UNCONTROLLED.

REVISION HISTORY				
ZONE	REV	DESCRIPTION	DATE	APPROVED

NOTES:

1. INLET & OUTLET ARE 1-1/2" GROOVED PIPE.
2. MAXIMUM PRESSURE: 150 psi (10.3 bar).
3. MAXIMUM TEMPERATURE: 180°F (82.2°C).
4. PRESSURE LOSS: 2-15 psid (.14-1.03 bar) AT RATED FLOW.
5. RATED FLOW: 40-95 gpm (9-21 m³/hr).
6. APPROXIMATE DRY WEIGHT: 170 lbs (77 kg).
7. FINISH: LAKOS BLACK (EXTERIOR ONLY).

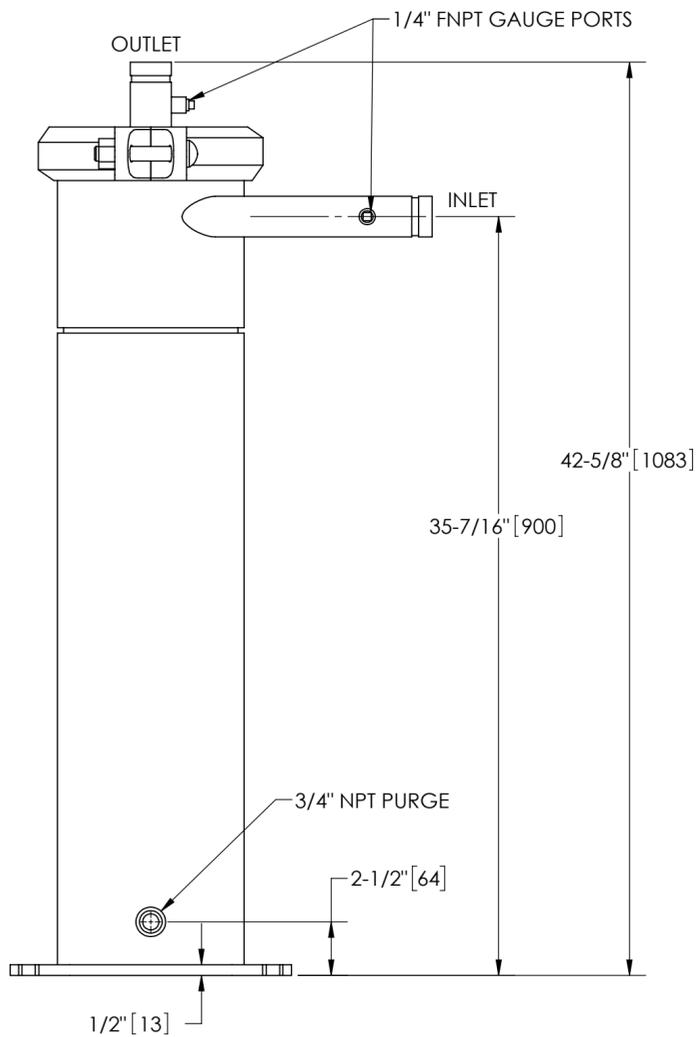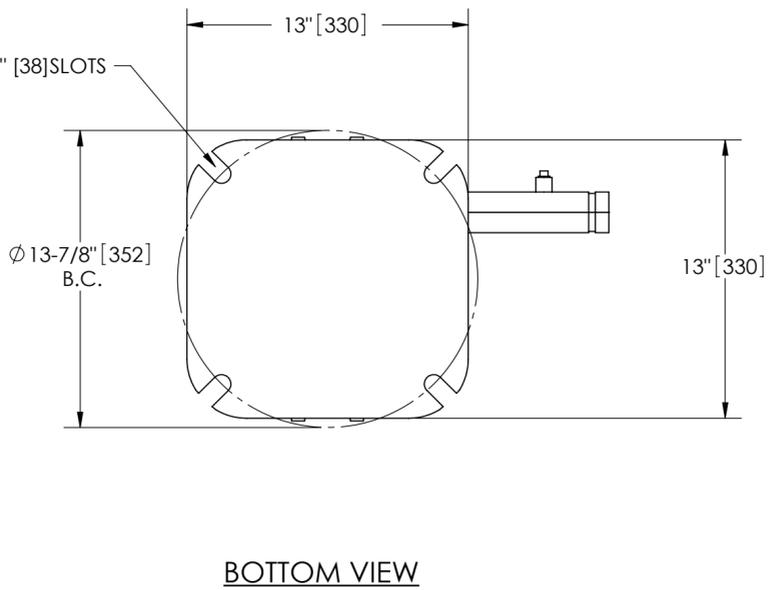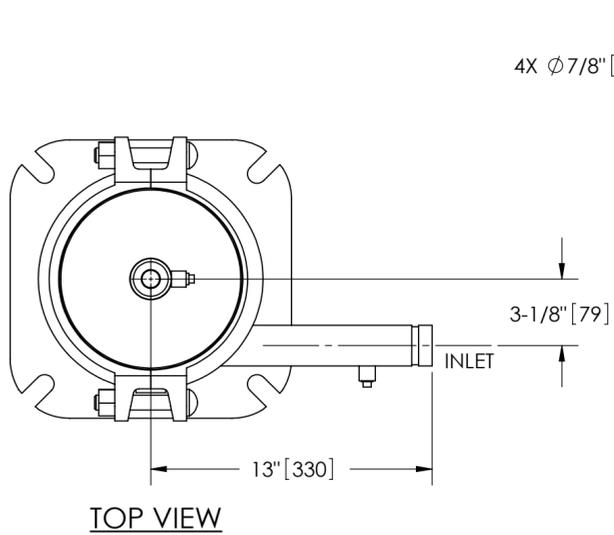

### SUBMITTAL DRAWING

This drawing is submitted for spatial consideration only. Do not pre-plumb to these dimensions.

<small>UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN: INCHES [mm] TOLERANCES ARE:</small> <small>FRACTIONS    DECIMALS    ANGLES</small> <small>± 1/2"        .XX ± .01        ± 1/4°</small> <small>                 .XXX ± .005</small> <small>                 .XXXX ± .0005</small>	ENGINEERED FOR:			
	STANDARD			
	DO NOT SCALE DRAWING	APPROVALS	DATE	TITLE
	MATERIAL	ENGR		
FINISH	REVIEW			
	WORK ORDER	QTY.		
	SCALE	EST. WT.	SHEET	REV.
	1:8	168 lb	1 OF 1	D

DWG NO. 135034  
 SHEET 1  
 REV. D