

LAKOS FILTRATION SOLUTIONS AutoPurge with Motorized Pinch Valve

AKE Series

Heavy-Duty Pinch Valve for Industry's Toughest Purging Applications

This electricity-powered pinch valve (no compressed air requirement) features heavy-wall rubber construction for extended duty in tough applications. Closure is actuated by two opposing gear-driven cams. Teamed with the LAKOS AutoPurge Controller for maximum purging options, this valve provides durability and dependability.

- Full flow-through design
- Only one wetted component
- No flange-gasket requirements; meets ANSI standards
- Bubble-tight closure, even when solids are present
- Maximum operating pressure of 125 psi (8.6 bar)
- Temperature range of the valve: -40 to 275°F (-40 to 135°C); Consult factory for higher temperatures
- Corrosion-resistant vinylester-fiberglass construction

Controller

- Serves worldwide single-phase voltages, from 100 to 240 VAC, 50/60Hz (5 amp max.) Consult factory for additional voltage options
- Wide range of options for programming purge cycle frequency and duration
- Solid state reliability; no routine maintenance required
- Durable NEMA-4x rated housing; IP 66 equivalent
- Compression molded, fiberglass reinforced polyester housing
- Non-volatile memory - all controller settings are maintained in the event of a loss of power; no programming required

SUGGESTED INSTALLATION



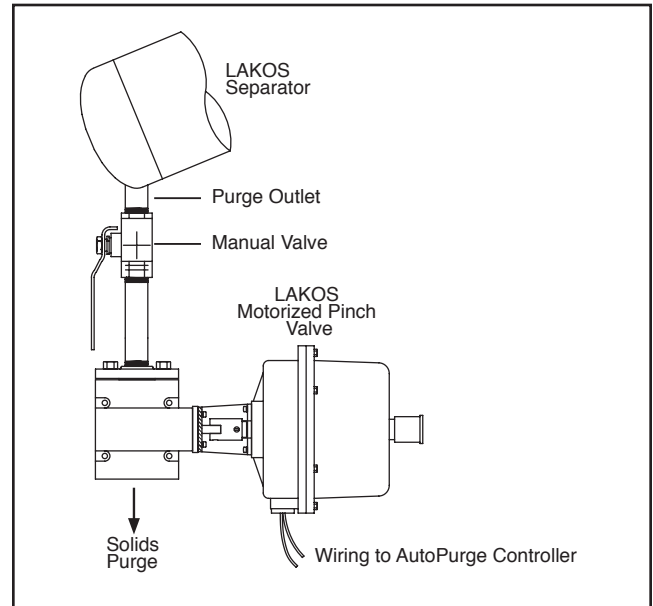


ILLUSTRATION OF CONTROLLER FACE

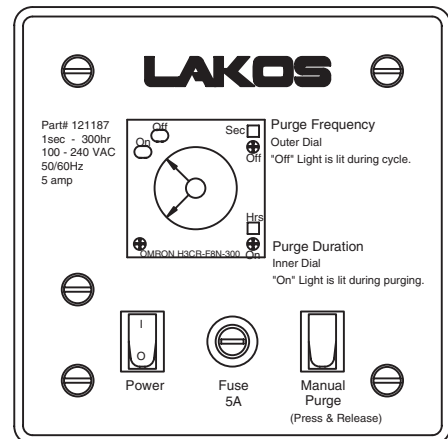

WIRING DIAGRAM

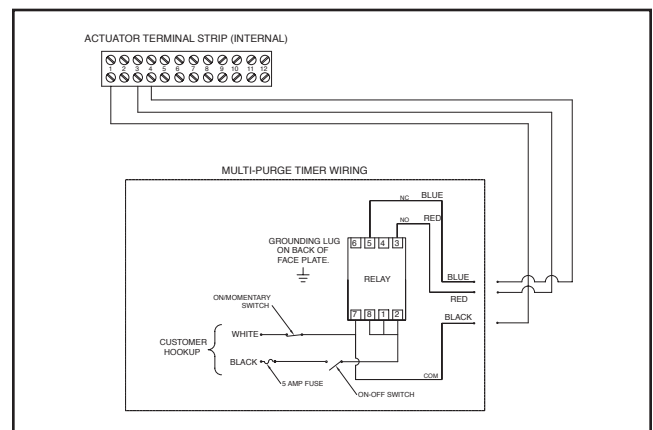

See reverse for additional specifications

Motorized Pinch Valve

Operation: The controller must be set for purge frequency and purge duration. Recommended minimum purging duration: 20-30 seconds. See details on front page for controller.

The LAKOS AKE Motorized Pinch Valve closes when power is applied to the motor via the controller, activating two opposing gear-driven cams to effectively press the valve liner closed. Upon completion of the programmed purge duration, the gear-driven cams similarly activate to re-open the valve port.

Installation: See illustration on front page. It is recommended that a manual valve be installed between the LAKOS Separator and the LAKOS AKE Motorized Pinch Valve to allow for shutting-off purge flow for servicing the AKE Valve if necessary. This manual valve is not provided with the LAKOS AKE Valve.

Valve may be installed in any configuration, but purge flow should be downward from the LAKOS Separator. Avoid uphill piping, elbows and turns which could create clogging or troublesome accumulation of solids in the purge line piping.

Valve Model	Line Size Flanged	Valve Weight	
		lbs.	kg
AKE-07	3/4-inch	5	2.3
AKE-15	1-1/2-inch	9.4	4.3
AKE-20	2-inch	14.5	6.6

Liquid Loss

When the application allows that purging is the final handling of the separated solids, it may be important to know the volume of fluid which may be lost when purging. This information is subject to variations, based on separator size, flow rate and system pressure. Volumes noted here identify the total volume purged (both liquid and solids).

Purge Size	10 Second Duration*
3/4-inch	3-12 gallons 12-45 liters
1 1/2-inch	12-50 gallons 45-190 liters
2-inch	25-95 gallons 95-360 liters

*Motorized ball valves require a minimum purge duration of 10 seconds.

Limited Warranty

LAKOS products are factory tested to meet the highest quality standards in the filtration industry. Please refer to <http://www.lakos.com/warranty> for information about the warranty on this and all other LAKOS products.

LAKOS products are protected under multiple U.S. and foreign patents and trademarks. For details, contact LAKOS.



1365 N. Clovis Avenue • Fresno, California 93727 USA
Telephone: (559) 255-1601 • Fax: (559) 255-8093
www.lakos.com • info@lakos.com