

EXCEPT AS OTHERWISE PROVIDED BY CONTRACT, THIS DRAWING AND SPECIFICATIONS SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF MATTER DEPICTED HEREIN WITHOUT THE EXPRESSED WRITTEN PERMISSION OF THE CLAUDE LAVAL CORPORATION, OR ITS ASSIGNEES.

THIS DRAWING HAS BEEN GENERATED AND IS MAINTAINED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY AN APPROVED ENGINEERING CHANGE ORDER (ECO). PAPER COPIES ARE UNCONTROLLED.


SUBMITTAL DRAWING

This drawing is submitted for spatial consideration only. Do not pre-plumb to these dimensions.

REVISIONS				
ECN	REV.	DESCRIPTION	DATE	APPROVED
	01	RELEASED FOR SUBMITTAL	10/13/16	CAL
	A	RELEASE FOR MANUFACTURING	6/1/2022	TRR

NOTES:

- INLET & OUTLET FLANGES ARE 6" 150# RF PER ANSI B16.5 REQUIRING 8X Ø 3/4" BOLTS (BOLTS AND GASKETS NOT INCLUDED).
- MAXIMUM PRESSURE: 150 psi (10.3 bar).
- MAXIMUM TEMPERATURE: 180°F (82°C).
- PRESSURE LOSS: 3-15 psid (.21-1.03 bar) AT RATED FLOW.
- RATED FLOW: 370-820 gpm (84-186 m³/hr).
- APPROXIMATE DRY WEIGHT: 778 lbs (353 kg).
- FINISH: POWDERCOAT LAKOS MEDIUM GRAY RAL-7005 (EXTERIOR ONLY).
- CERTIFIED UNDER NSF/ANSI STANDARD NSF-61 & ANNEX G.

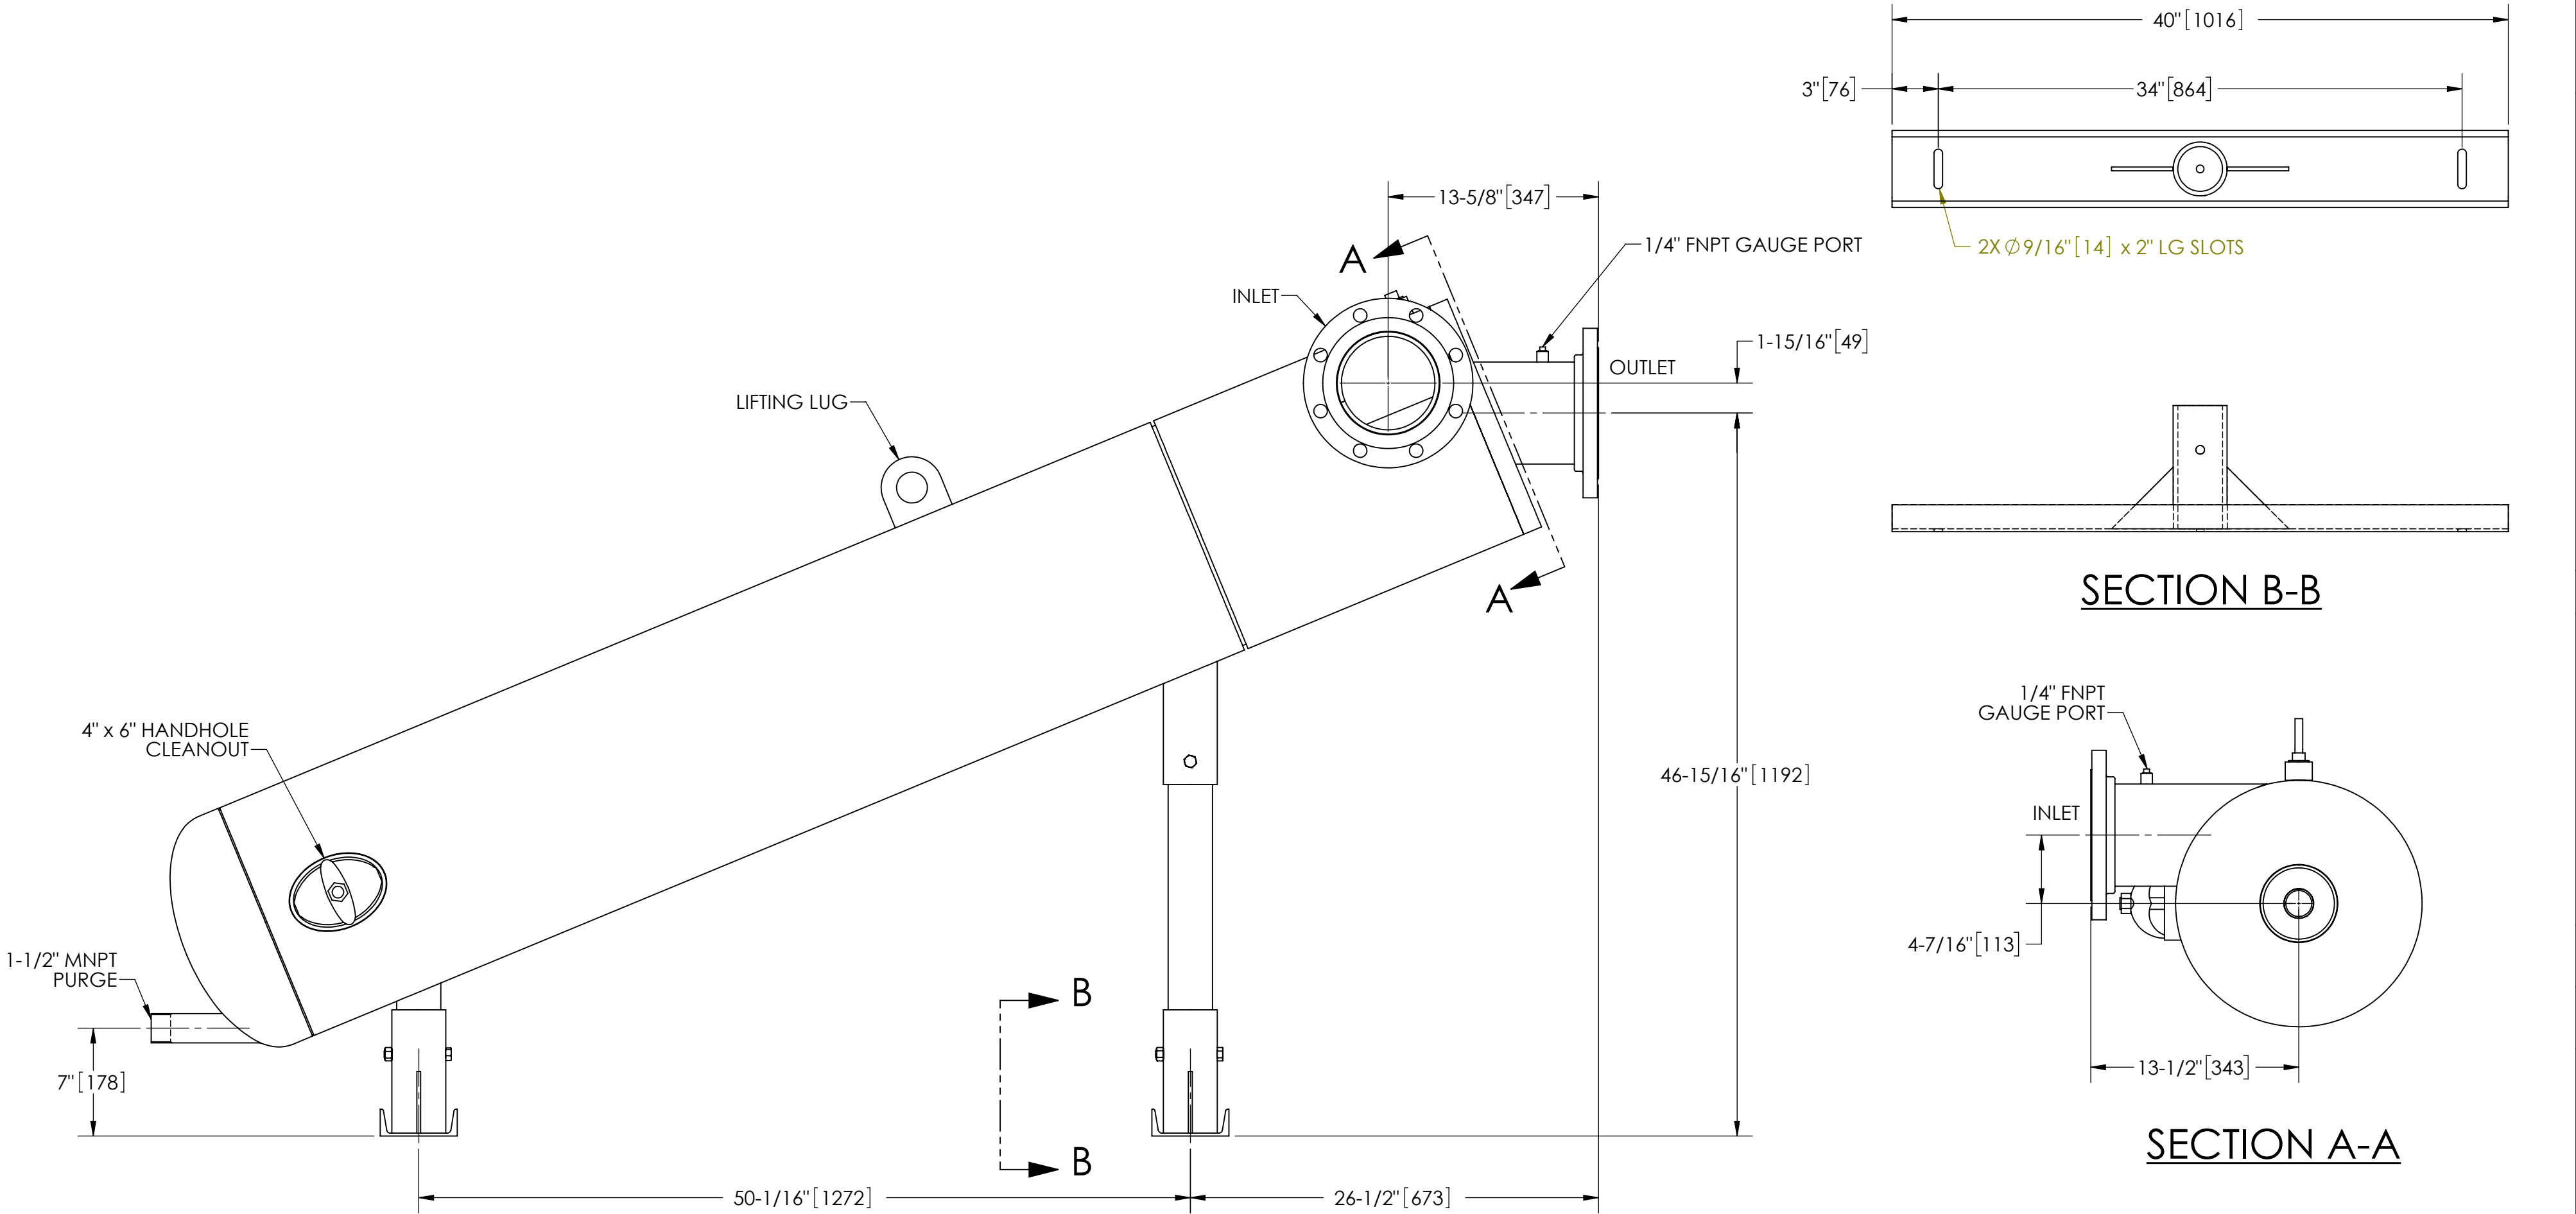

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN: INCHES [mm] TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± 1" .XX ± .01 ± 1/4° .XXX ± .005 .XXXX ± .0005			ENGINEERED FOR: STANDARD		LAKOS. CLAUDE LAVAL CORP. FRESNO, CALIFORNIA 93727 WWW.LAKOS.COM		
			APPROVALS	DATE			
DO NOT SCALE DRAWING			DRAWN	CAL	10/13/16	TITLE PWC-1050-L, SEPARATOR, 370-820 GPM, CARBON STEEL	
MATERIAL CLASS P-1 MILD CARBON STEEL			ENGR	-	-		
FINISH POWDERCOAT LAKOS MEDIUM GRAY RAL-7005			MFG	-	-	SIZE C	
			WORK ORDER		QTY.		
SCALE 1:8		EST. WT. 778 lb		SHEET 1 OF 1		DWG NO. 133377-09	
						REV. A	