

EXCEPT AS OTHERWISE PROVIDED BY CONTRACT, THIS DRAWING AND SPECIFICATIONS SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF MATTER DEPICTED HEREIN WITHOUT THE EXPRESSED WRITTEN PERMISSION OF THE CLAUDE LAVAL CORPORATION, OR ITS ASSIGNEES.

THIS DRAWING HAS BEEN GENERATED AND IS MAINTAINED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY AN APPROVED ENGINEERING CHANGE ORDER (ECO). PAPER COPIES ARE UNCONTROLLED.



SUBMITTAL DRAWING

This drawing is submitted for spatial consideration only. Do not pre-plumb to these dimensions.


REVISIONS				
ECN	REV.	DESCRIPTION	DATE	APPROVED
	E	ADD CENTER OF GRAVITY AND OPERATING WEIGHT	10/10/17	AMF

NOTES:


1. INLET & OUTLET FLANGES ARE 6" 150# RF PER ANSI B16.5 REQUIRING 8X $\phi 3/4$ " BOLTS (BOLTS AND GASKETS NOT INCLUDED).
2. MAXIMUM PRESSURE: 150 psi (10.3 bar).
3. MAXIMUM TEMPERATURE: 180°F (82°C).
4. PRESSURE LOSS: 3-15 psid (.21-1.03 bar) AT RATED FLOW.
5. RATED FLOW: 370-820 gpm (84-186 m³/hr).
6. APPROXIMATE DRY WEIGHT: 778 lbs (351 kg).
7. APPROXIMATE OPERATING WEIGHT: 1385 lbs (628 kg).
8. FINISH: POWDERCOAT LAKOS MEDIUM GRAY RAL-7005 (EXTERIOR ONLY).
9. CERTIFIED UNDER NSF/ANSI STANDARD NSF-61 & ANNEX G.

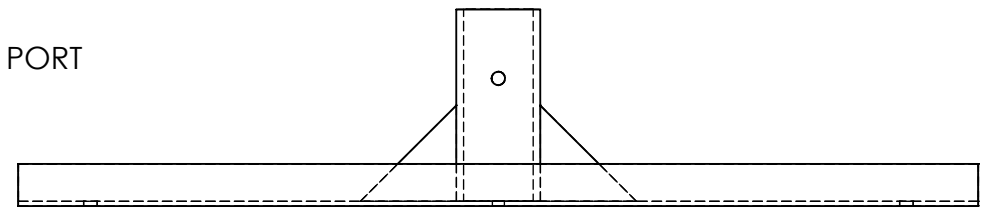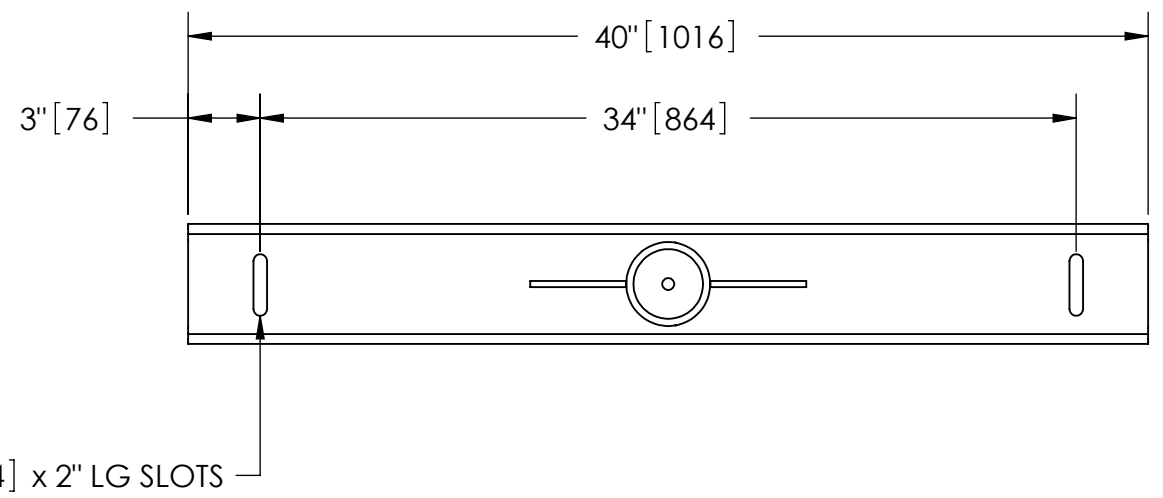

SECTION B-B

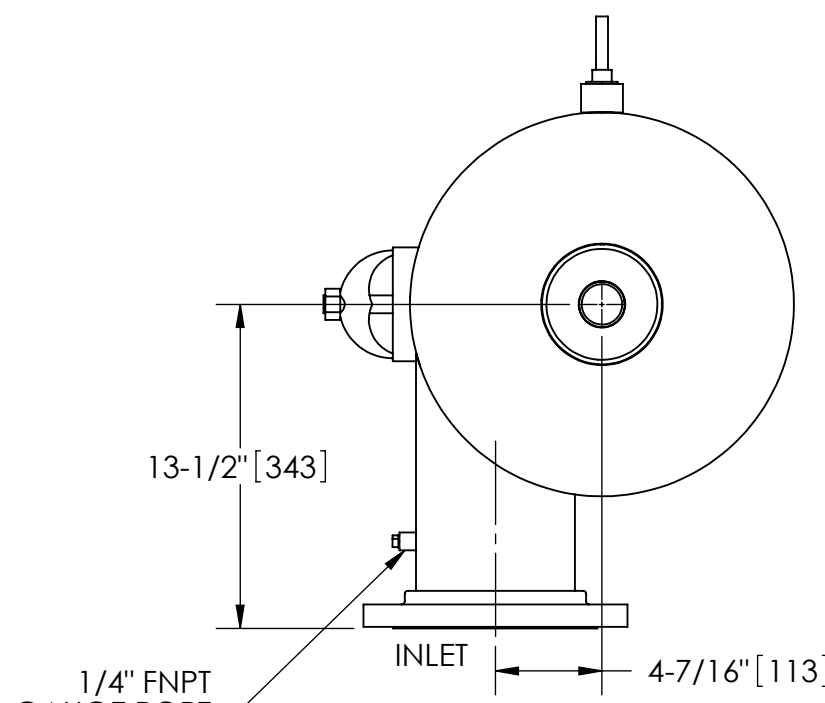

SECTION A-A

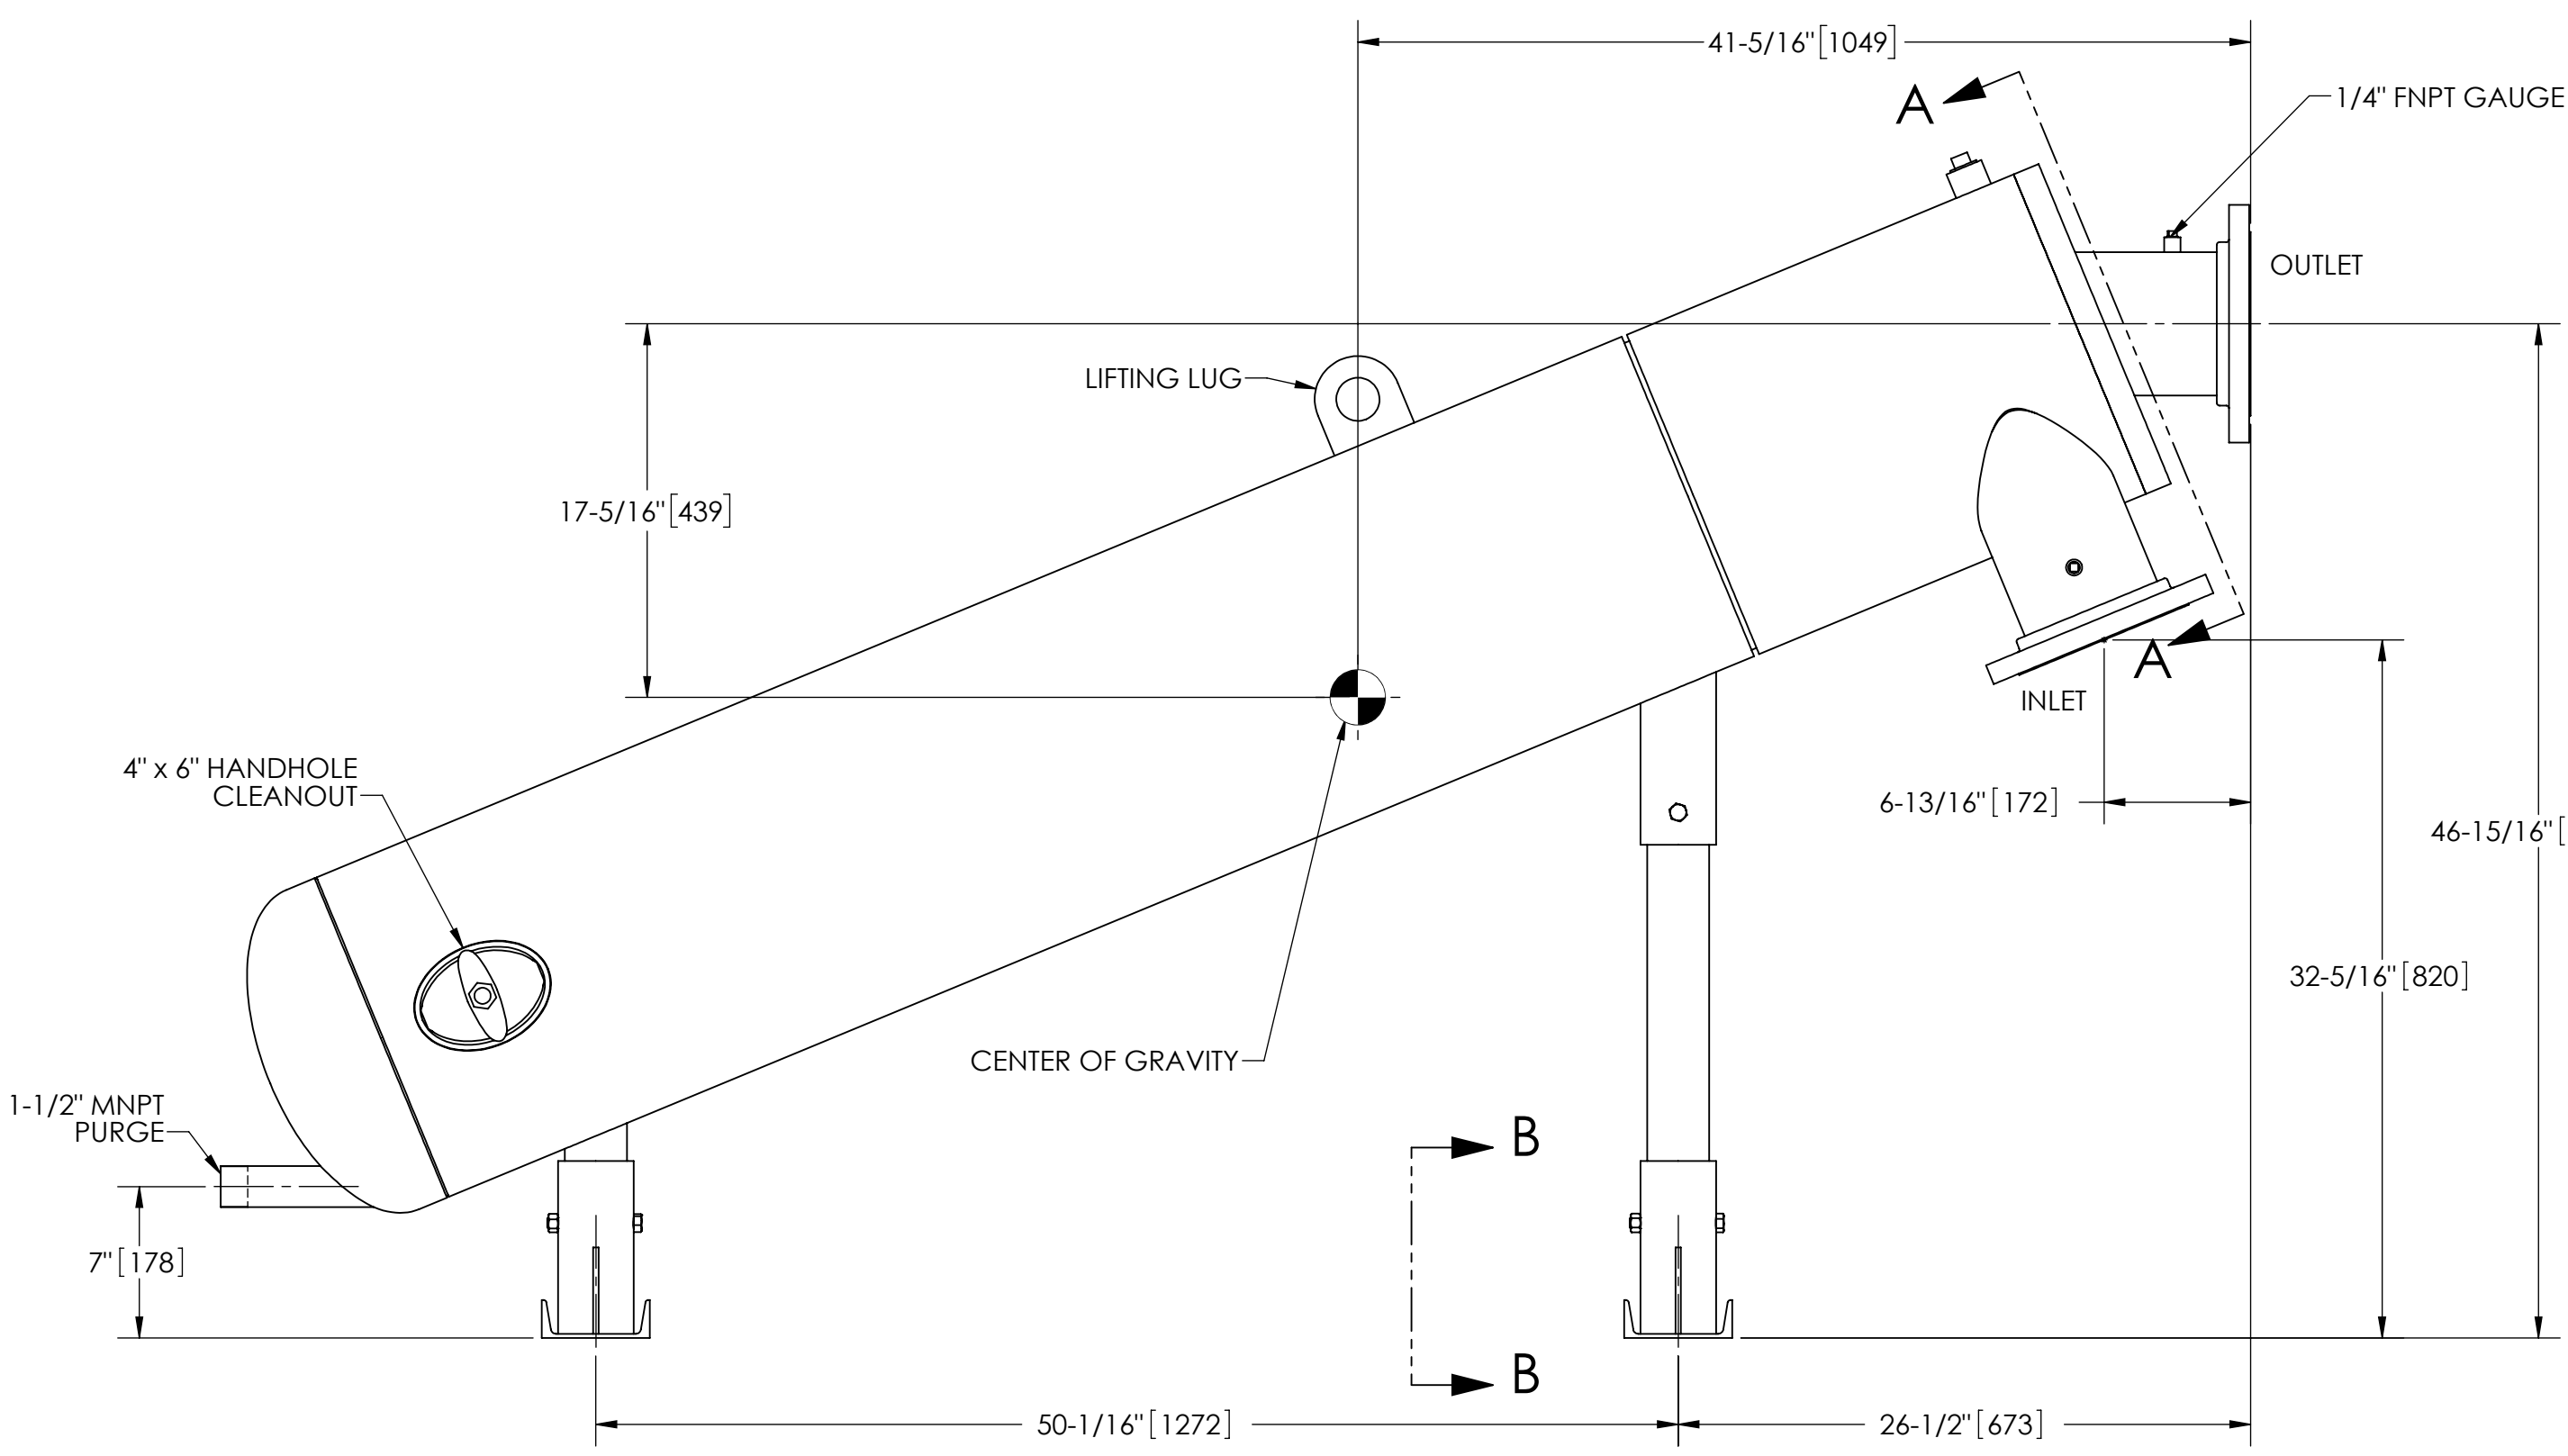

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN: INCHES (mm) TOLERANCES ARE:		ENGINEERED FOR: STANDARD	
FRACTIONS ± 1"	DECIMALS .XX ± .01 .XXX ± .005 .XXXX ± .0005	ANGLES ± 1°	DATE
DO NOT SCALE DRAWING		APPROVALS	DATE
MATERIAL CLASS P-1 MILD CARBON STEEL	FINISH POWDERCOAT LAKOS MEDIUM GRAY RAL-7005	DRAWN CAG	1/30/12
		ENGR	-
		MFG	-
		WORK ORDER	QTY.

LAKOS		CLAUDE LAVAL CORP. FRESNO, CALIFORNIA 93727 WWW.LAKOS.COM	
TITLE PWC-1050-L, SEPARATOR, 370-820 GPM, CARBON STEEL			
SIZE C	MODEL NO.	DWG NO. 133377	REV. E
SCALE 1:8	EST. WT. 778 lb	SHEET 1 OF 1	

DWG. NO. 133377 SHEET 1 REV. E