

4

3

2

1



EXCEPT AS OTHERWISE PROVIDED BY CONTRACT, THIS DRAWING AND SPECIFICATIONS SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF MATTER DEPICTED HEREIN WITHOUT THE EXPRESSED WRITTEN PERMISSION OF THE LAKOS CORPORATION, OR ITS ASSIGNEES.

REVISION HISTORY				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	C	UPDATE TO CURRENT STANDARDS	7/20/22	AMF


NOTES:

1. INLET & OUTLET FLANGES ARE 20" 150# RF PER ANSI B16.5 REQUIRING 20X Ø 1-1/8" BOLTS (BOLTS AND GASKETS NOT INCLUDED).
2. MAXIMUM PRESSURE: 150 psi (10.3 bar).
3. MAXIMUM TEMPERATURE: 180°F (82.2°C).
4. PRESSURE LOSS: 3-12 psid (.2-.8 bar) AT RATED FLOW.
5. RATED FLOW: 6700-12750 gpm (1520-2895 m³/hr).
6. APPROXIMATE DRY WEIGHT: 8929 lbs (4050 kg).
7. FINISH: LAKOS BLUE (EXTERIOR ONLY).

THIS DRAWING HAS BEEN GENERATED AND IS MAINTAINED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY AN APPROVED ENGINEERING CHANGE ORDER (ECO). PAPER COPIES ARE UNCONTROLLED.

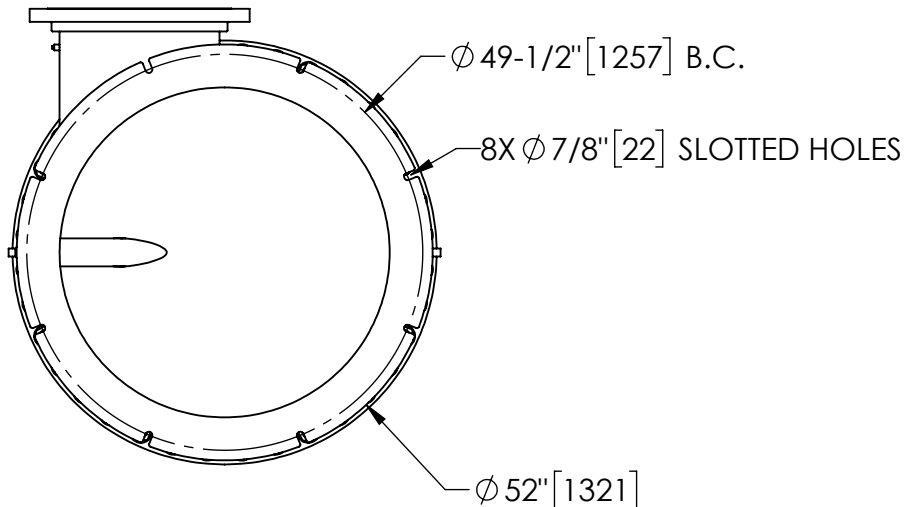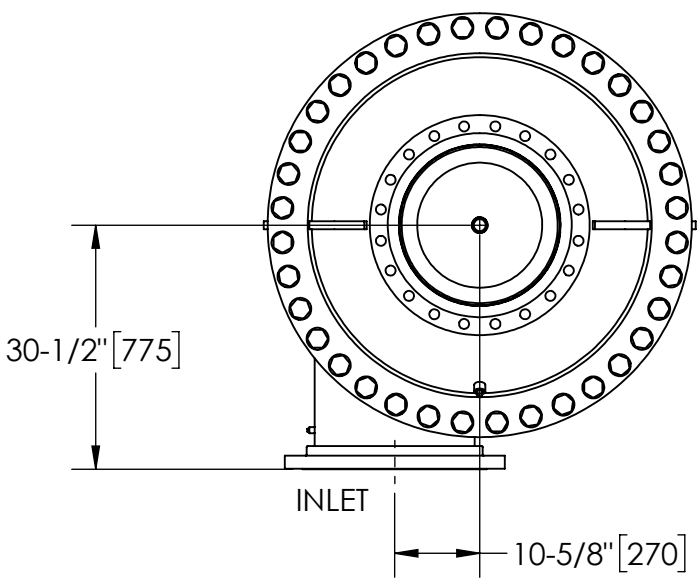

BOTTOM VIEW

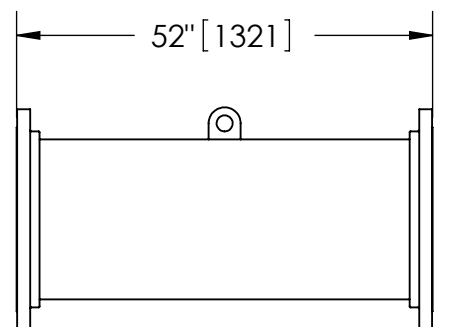

FLANGED SPOOL

MODEL FS-20 (AVAILABLE SEPARATELY)
REQUIRED FOR REMOVAL OF TOP ASSEMBLY

SUBMITTAL DRAWING

This drawing is submitted for spatial consideration only. Do not pre-plumb to these dimensions.

D

C

B

A

D

C

DWG NO.

125886



SHT

1

REV/

C

A

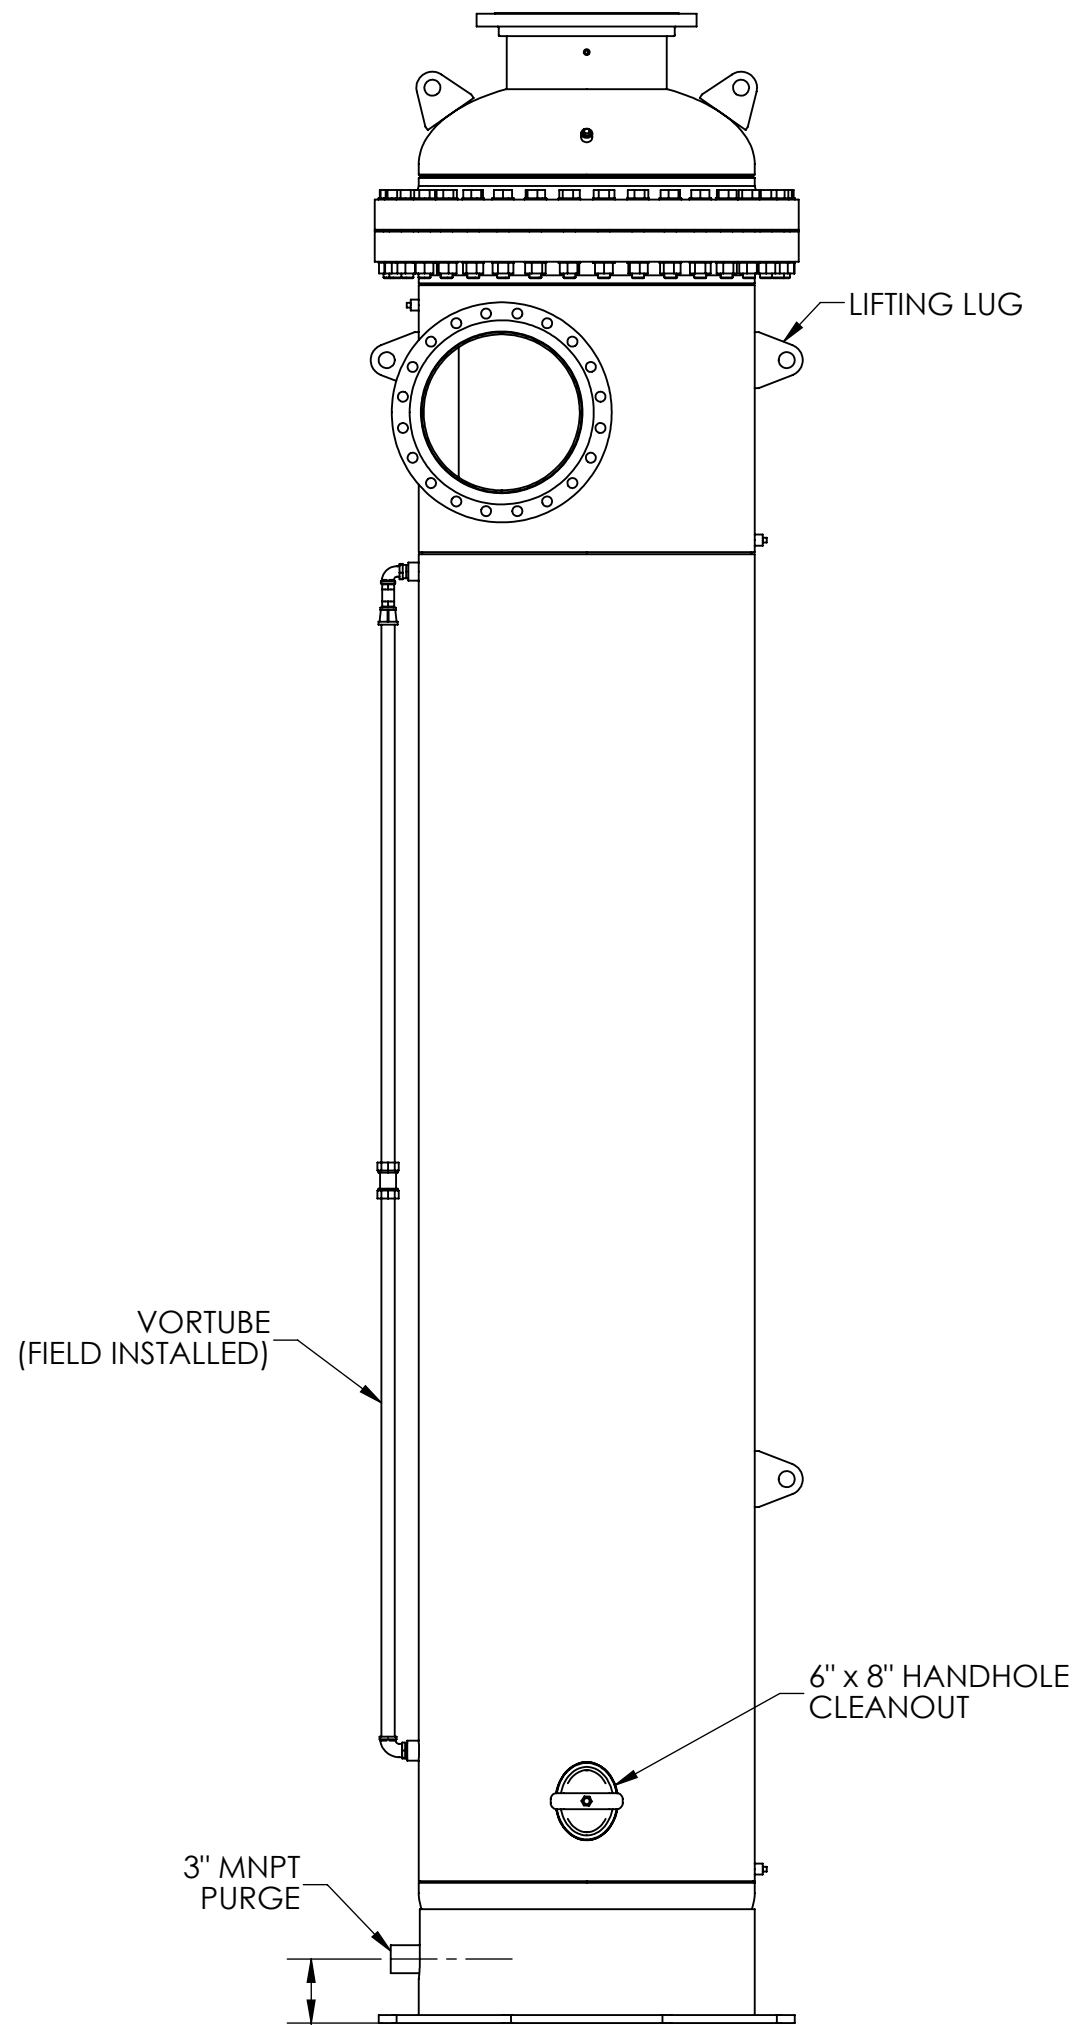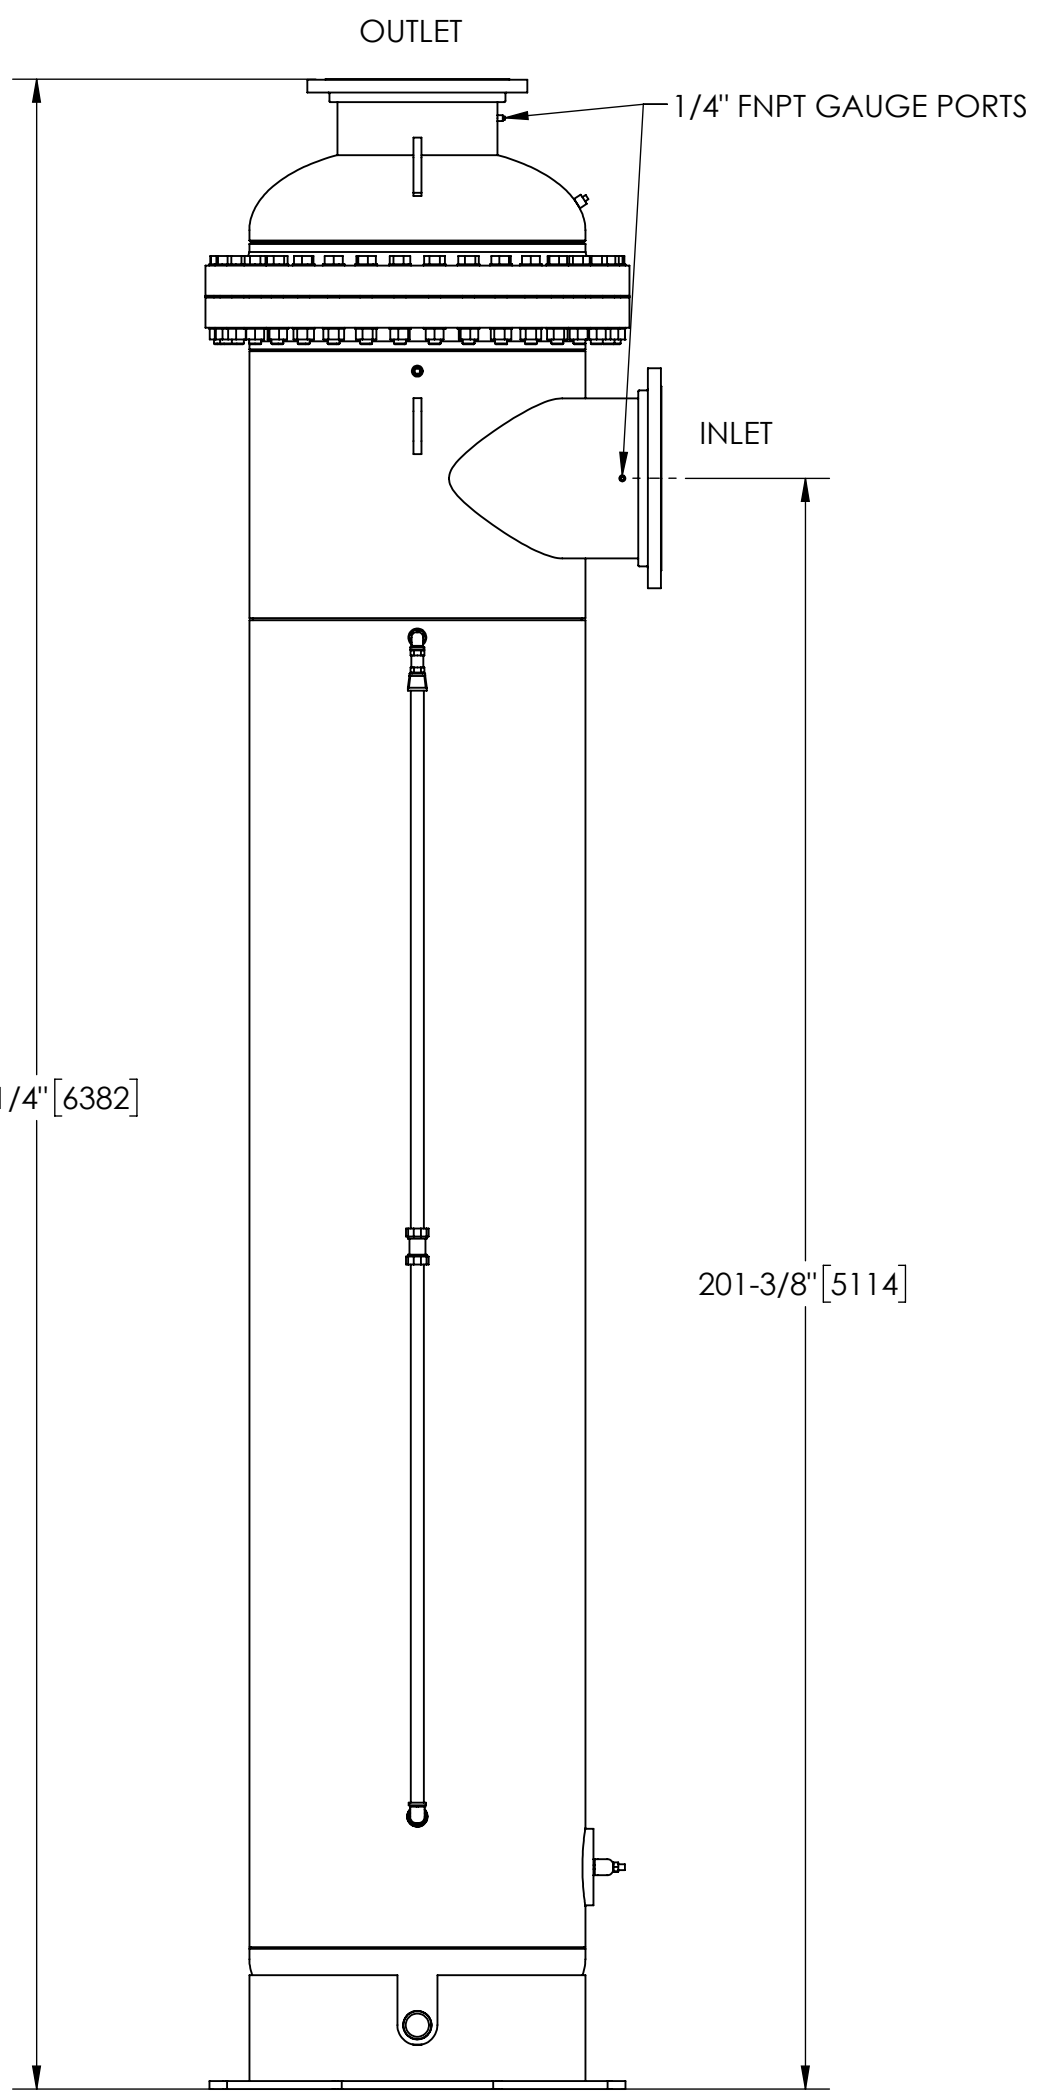

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN: INCHES [mm] TOLERANCES ARE: FRACTIONS .XX ± .01 ± 1/4" DECIMALS .XXX ± .005 ANGLES ± 1/4"	ENGINEERED FOR: FLANGED		
	APPROVALS	DATE	
	DRAWN SDF/LC	6/29/05	
	ENGR JBI	6/19/08	
DO NOT SCALE DRAWING	MATERIAL CLASS P-1 MILD CARBON STEEL	REVIEW -	TITLE JPX-6700-V/FLG, SEPARATOR, 6700-12750 gpm, CARBON STEEL
FINISH LAKOS BLUE	WORK ORDER	QTY.	SIZE C
			MODEL NO.
			DWG NO. 125886
			EST. WT. 8929 lb
			SHEET 1 OF 1

4

3

2

1