

4

3


2

1

EXCEPT AS OTHERWISE PROVIDED BY CONTRACT, THIS DRAWING AND SPECIFICATIONS SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF MATTER DEPICTED HEREIN WITHOUT THE EXPRESSED WRITTEN PERMISSION OF THE LAKOS CORPORATION, OR ITS ASSIGNEES.


NOTES:

1. INLET & OUTLET FLANGES ARE 3" 150# RF PER ANSI B16.5 REQUIRING 4X Ø 5/8" BOLTS (BOLTS AND GASKETS NOT INCLUDED).
2. MAXIMUM PRESSURE: 150 psi (10.3 bar).
3. FOR MAXIMUM TEMPERATURE, CONSULT FACTORY.
4. PRESSURE LOSS: 3-12 psid (.2-.8 bar) AT RATED FLOW.
5. RATED FLOW: 130-225 gpm (30-51 m³/hr).
6. APPROXIMATE DRY WEIGHT: 352 lbs (160 kg).
7. OPERATIONAL WEIGHT: 465 lbs (211 Kg).
8. FINISH: POWDERCOAT LAKOS BLUE (EXTERIOR ONLY) SCOTCHKOTE 134 (INTERNAL WETTED SURFACES).

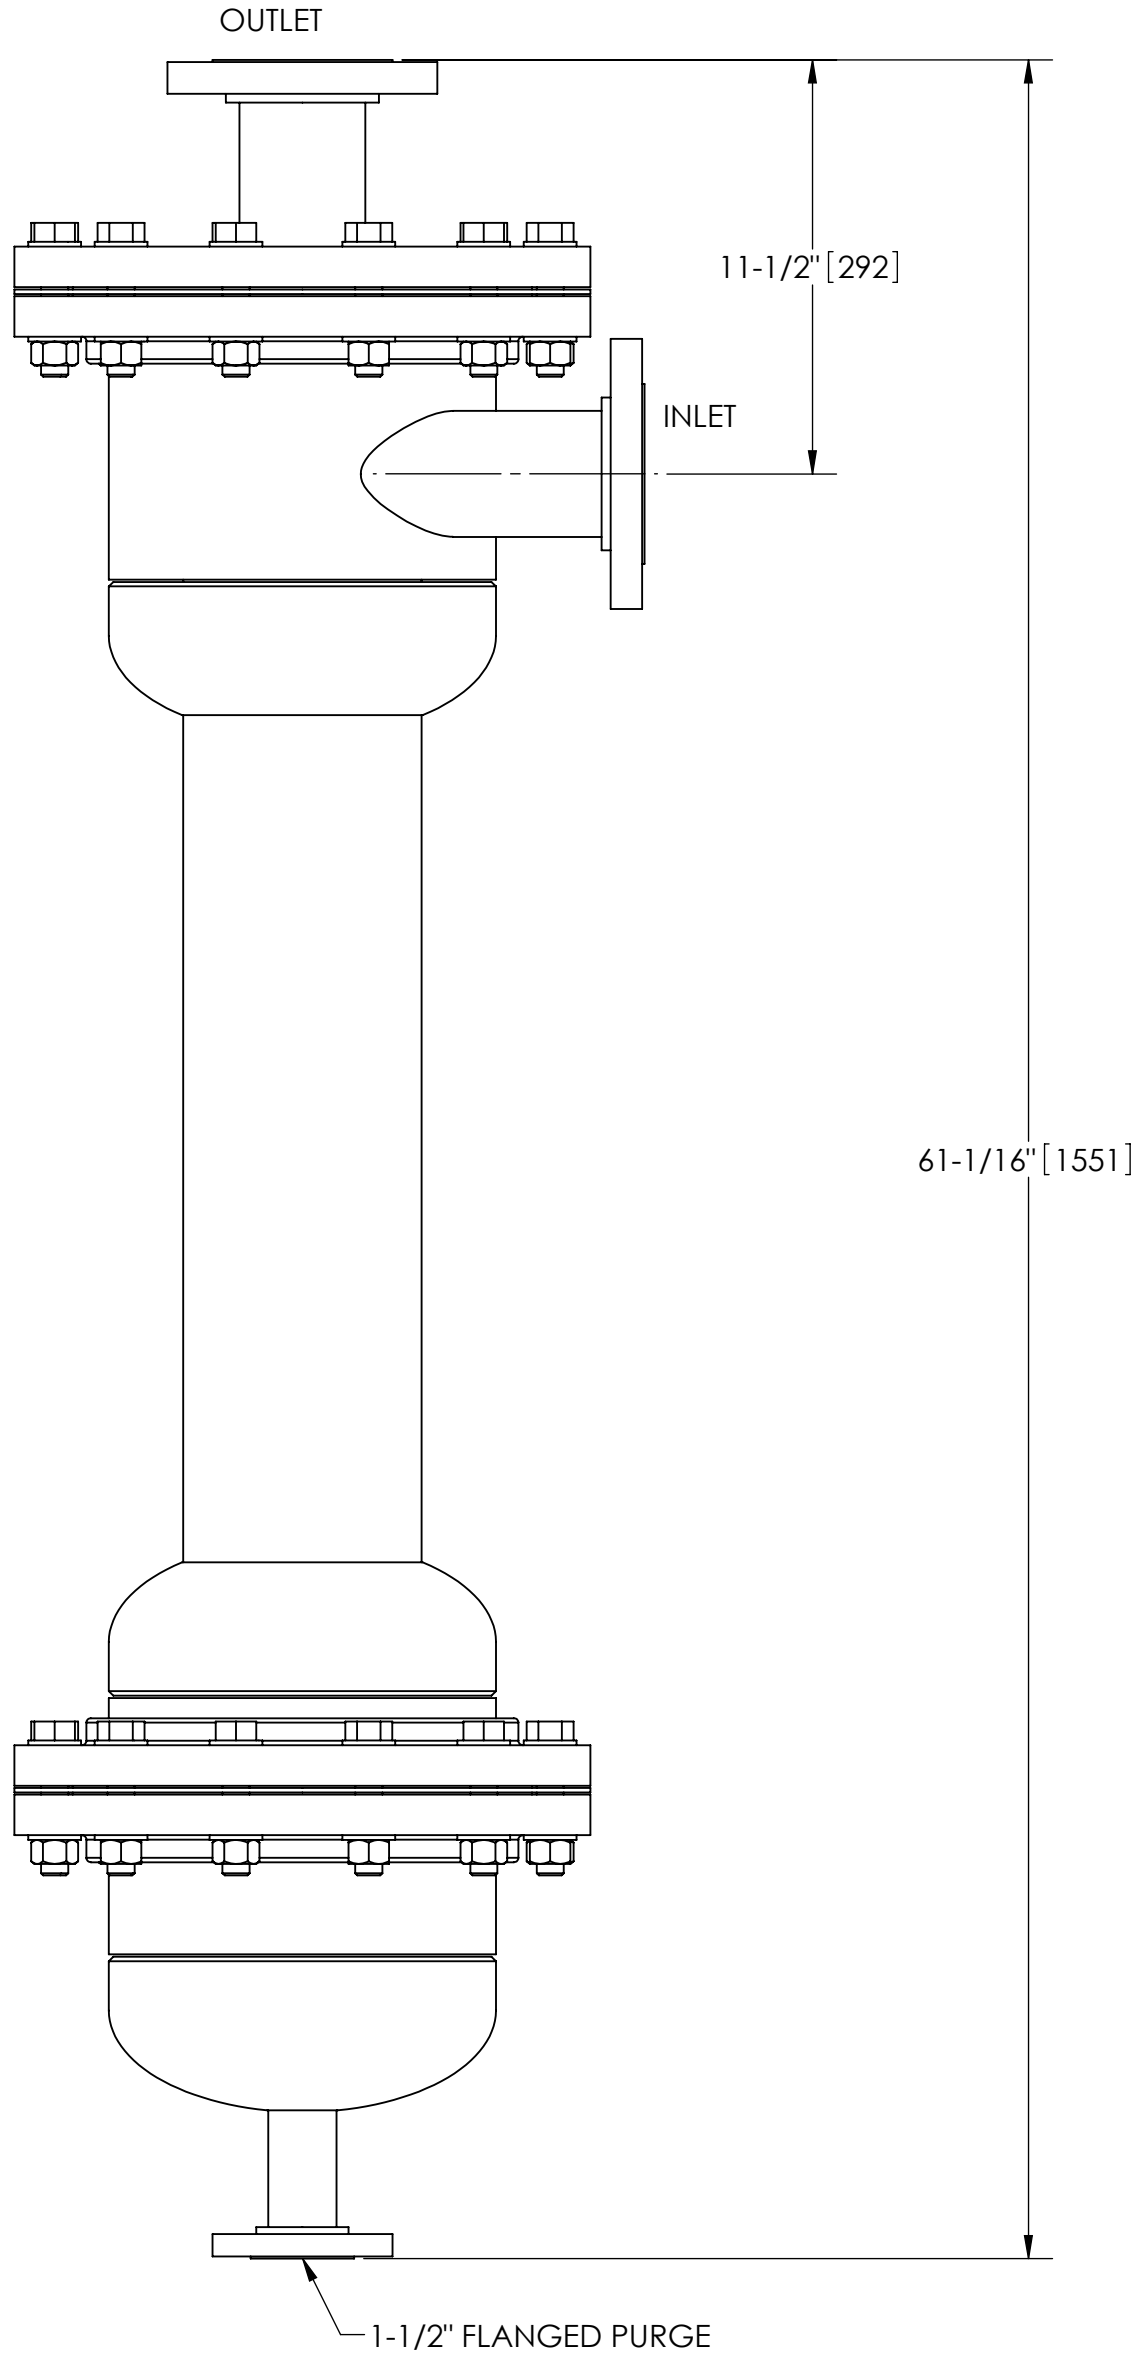


REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	C	UPDATED DRAWING TO CURRENT STANDARDS	1/3/20	CEE

THIS DRAWING HAS BEEN GENERATED AND IS MAINTAINED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY AN APPROVED ENGINEERING CHANGE ORDER (ECO). PAPER COPIES ARE UNCONTROLLED.

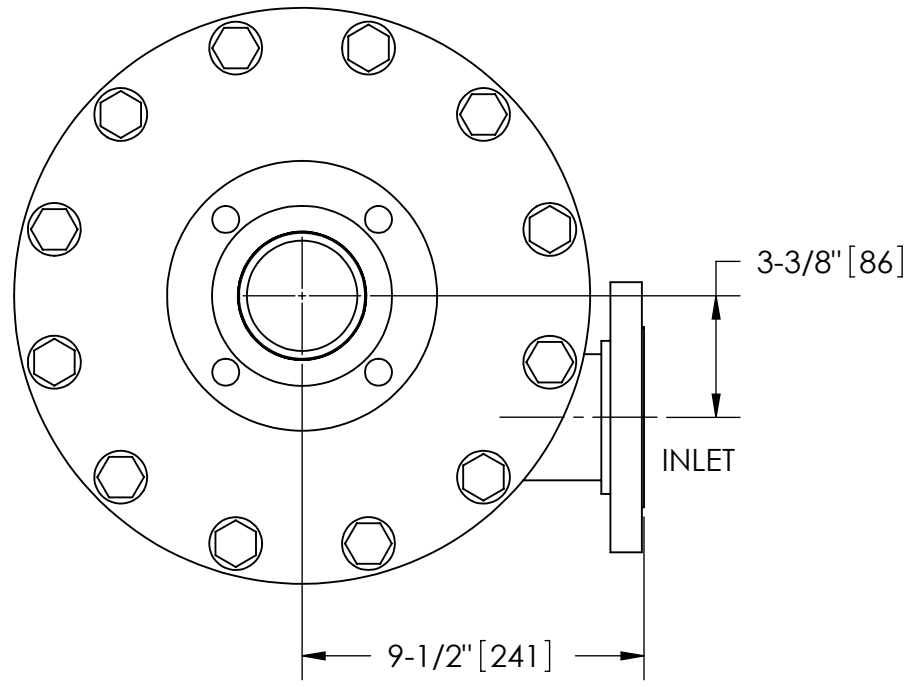

TOP VIEW

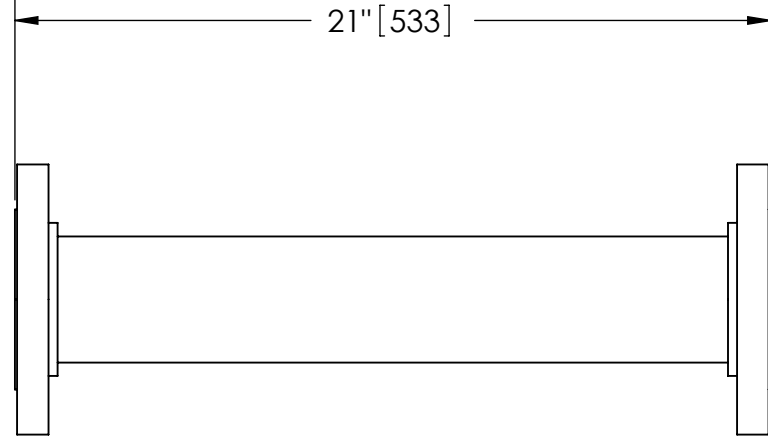

FLANGED SPOOL
MODEL FS-03 (AVAILABLE SEPARATELY)
REQUIRED FOR REMOVAL OF TOP ASSEMBLY

SUBMITTAL DRAWING

This drawing is submitted for spatial consideration only. Do not pre-plumb to these dimensions.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN: INCHES [mm] TOLERANCES ARE:		ENGINEERED FOR: STANDARD			
FRACTIONS ± 1/2"	DECIMALS .XX ± .01 .XXX ± .005 .XXXX ± .0005	ANGLES ± 1/4°	APPROVALS	DATE	TITLE
DO NOT SCALE DRAWING			DRAWN JBI	9/18/08	JSK-0130, SEPARATOR 3" JSK, CARBON STEEL/SCOTCHKOTE
MATERIAL CLASS P-1 MILD CARBON STEEL			ENGR JBI	9/19/08	
FINISH SEE NOTES			REVIEW -	-	SIZE MODEL NO. DWG NO. 129680
			WORK ORDER	QTY.	SCALE 3:16 EST. WT. 352 lb SHEET 1 OF 1

4

3

2

1

DWG NO. 129680
SHEET 1
REV. C