

** Inlet/outlet may also be specified with ANSI flanges, DIN flanges or other connections. Consult factory for details.

*** These items available as an option from LAKOS.


These components not provided by LAKOS. Strainer is recommended standard practice for protection of pump from larger debris.

(See reverse side for solids-purging alternative.)


SIDE-STREAM APPLICATION

LAKOS TBX Booster System with SRV


Use "Dirt Leg" tee to enhance
removal efficiencies.



System Flow
Strainer

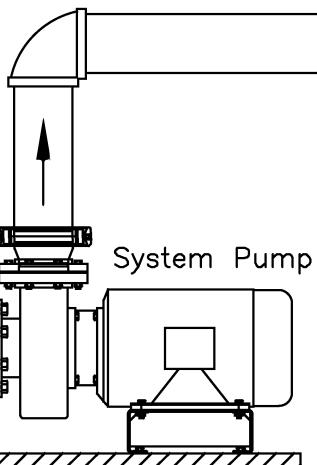

System Pump

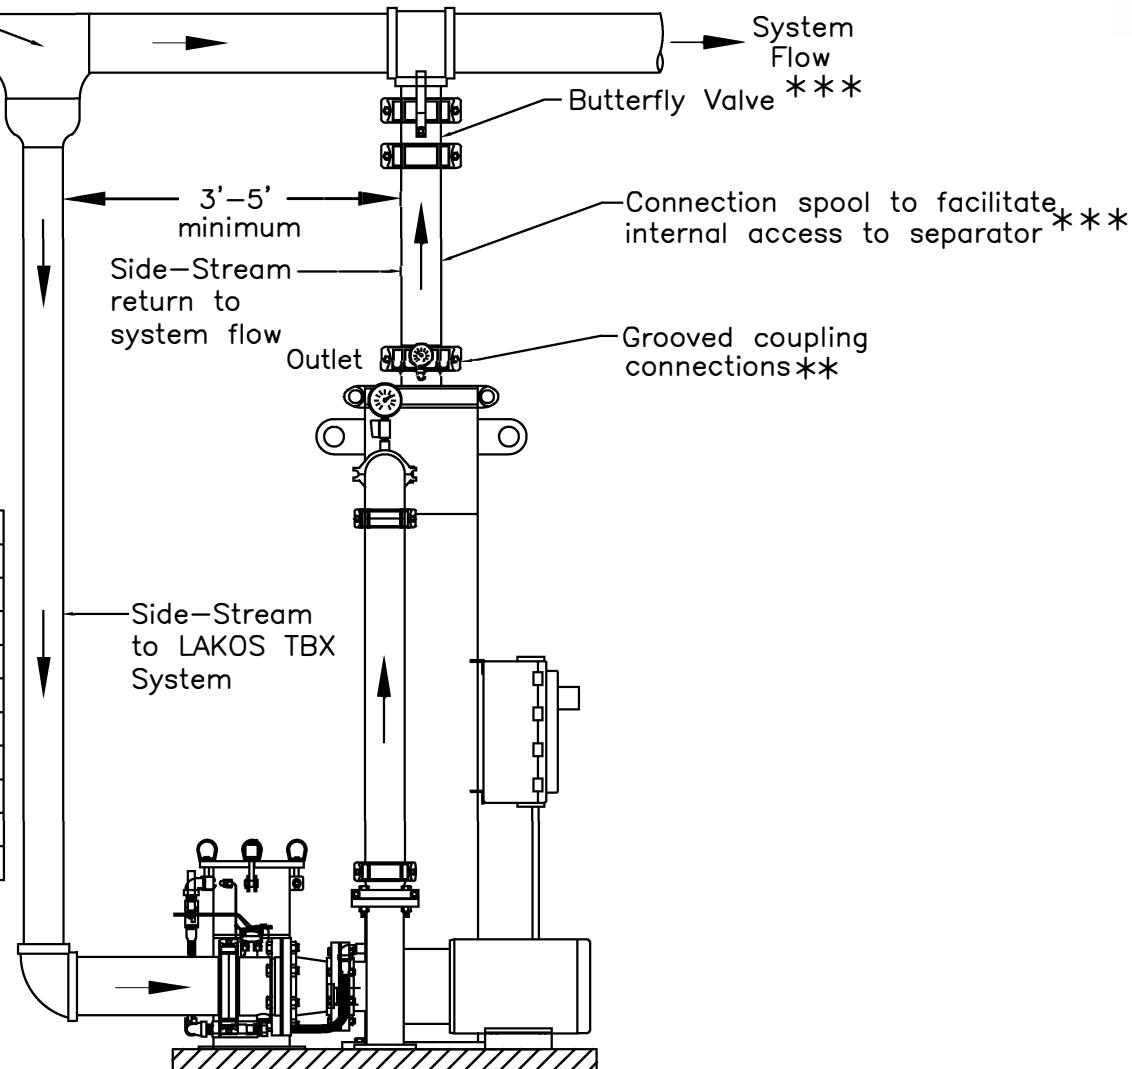

Booster System	Flow Rate	Pump	
Model:	U.S. gpm	m ³ /hr	HP
TBX-0065-SRV	65	15	1.5
TBX-0100-SRV	100	23	2
TBX-0145-SRV	145	33	3
TBX-0200-SRV	200	45	5
TBX-0280-SRV	280	64	5
TBX-0400-SRV	400	91	7.5
TBX-0525-SRV	525	119	15
TBX-0825-SRV	825	187	20
TBX-1100-SRV	1100	250	20

** Inlet/outlet may also be specified with ANSI flanges,
DIN flanges or other connections. Consult factory for details.

LAKOS TBX Booster
System with SRV

*** These items available as an option from LAKOS.

(See reverse side for solids-purging alternative.)